26 0 0 10.56 0 0 Tm /F8 1 Tf

& ' / Descriptions

Surface Mount Fast Recovery Rectifiers, Reverse Voltage 50 to1000V,Forward Current:2.0A ,SMA package.

( ) / Features

Glass Passivated Chip Junction, Lead free in comply with EU RoHS 2011/65/EU directives, For surface mounted applications. HF product.

* + / Applications

General purpose.


, - . / 0 1 / E



" # $ % / Marking

See Marking Instructions.

0 8 9 = > ? / Electrical Characteristic Curve

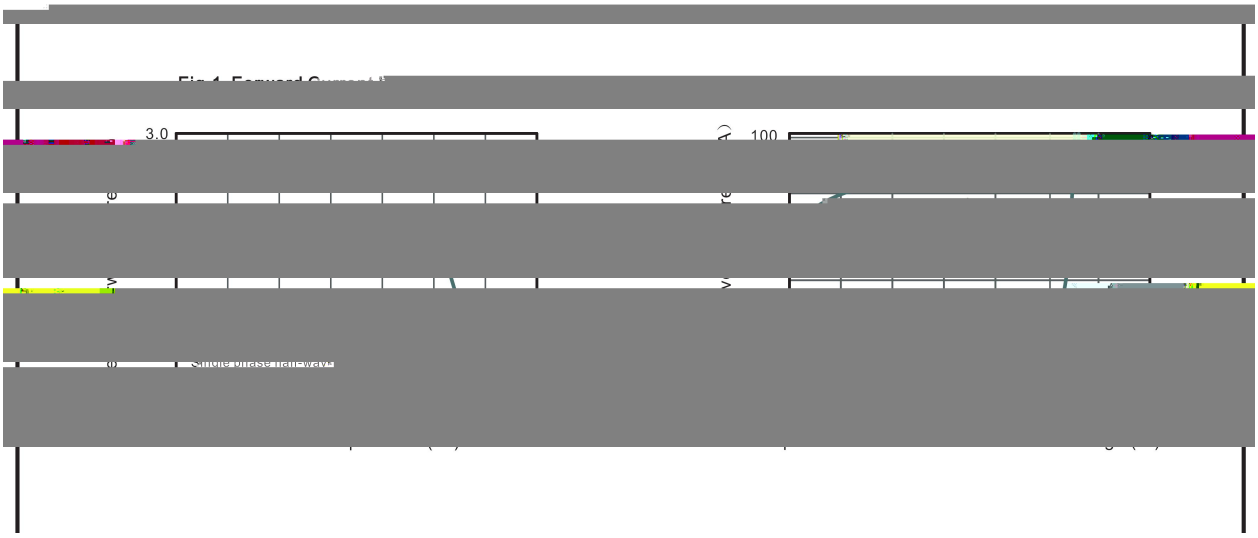



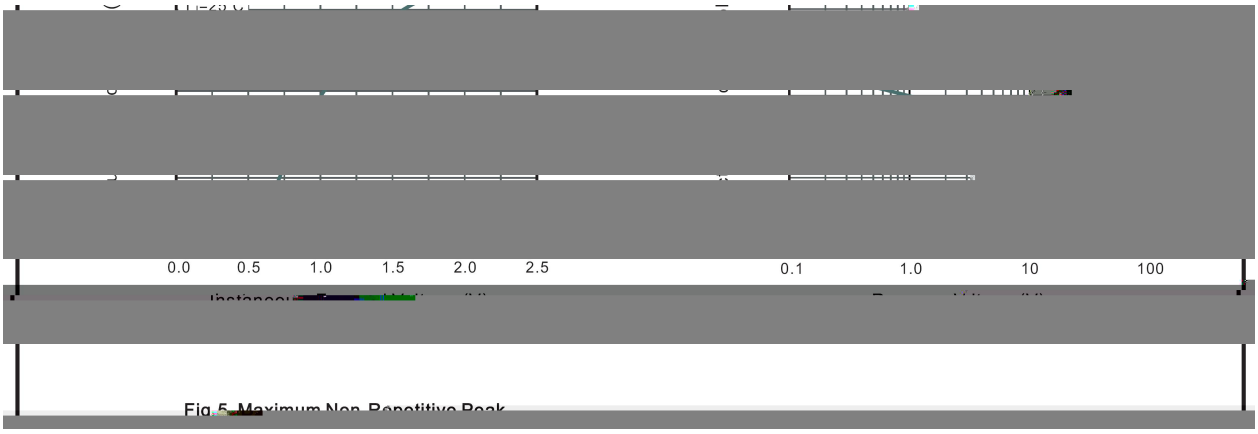



Fig.5 Maximum Non-Repetitive Peak

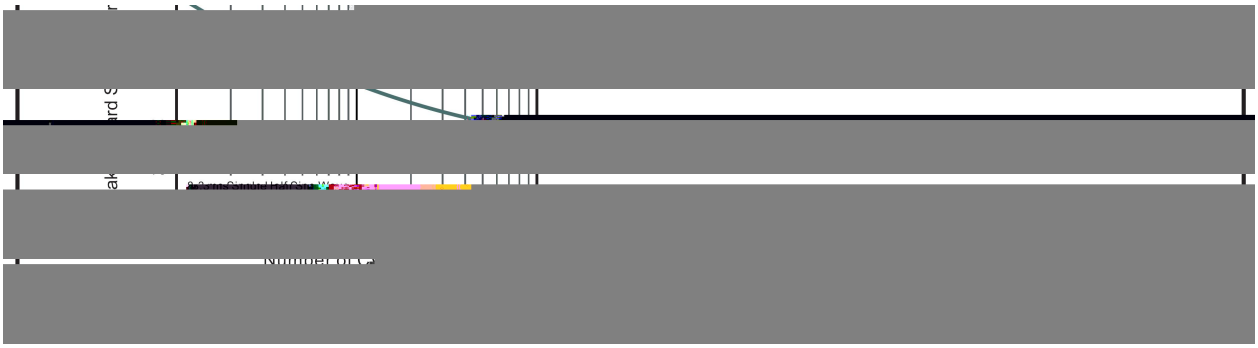

@ A B C ? / Package Dimensions


SMA

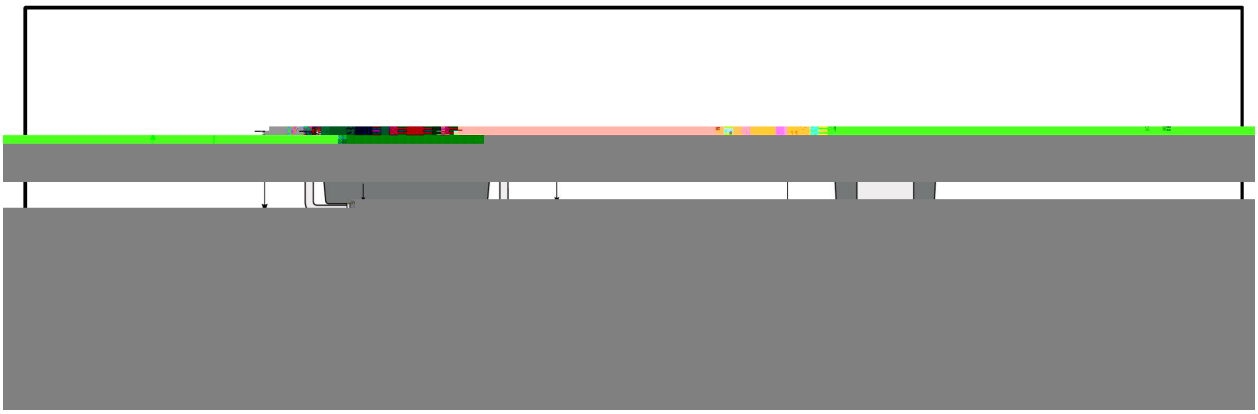

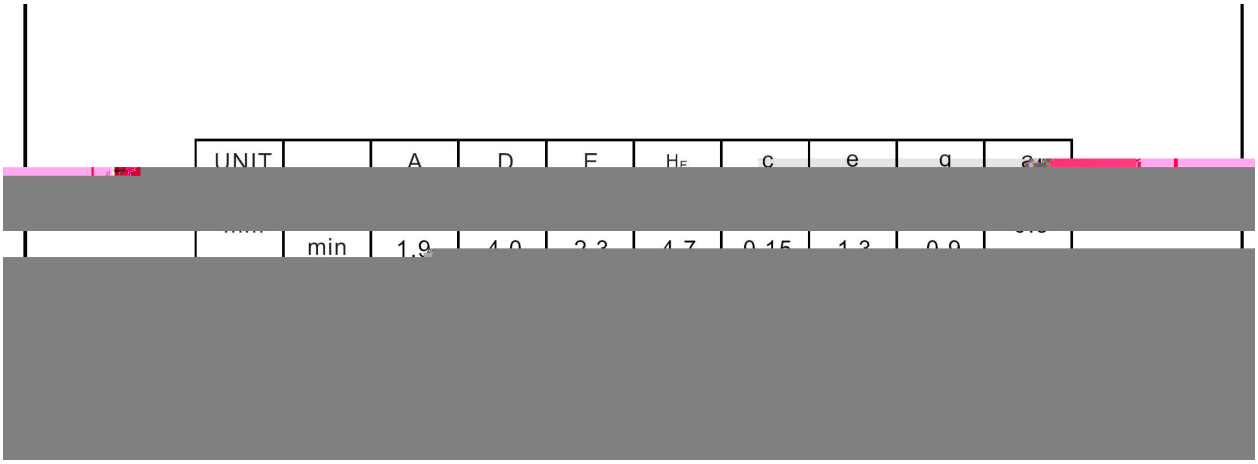

UNIT		A	D	E	H_E	c	e	q	a
mm	min	1.9	4.0	2.3	4.7	0.15	1.3	0.9	

" # D E / Marking Instructions

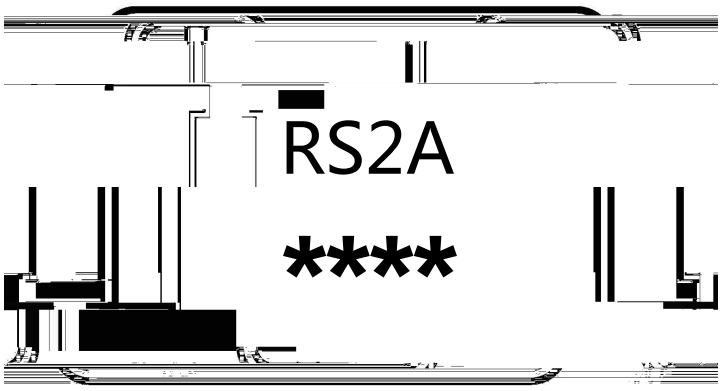

******** **F** **F**

Note:

Product Type Code

******** Lot No. Code The 1st **F** means:YM Code The last 3 **F**means:little Lot No Code

Marking

