/ Descriptions

40~60V 2.0A

/ Features


/ Applications

.


/ Equivalent Circuit



/ Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

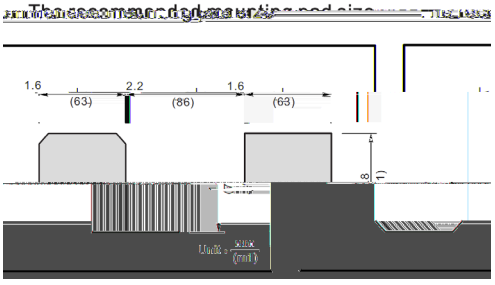


/ Marking

·

/ Electrical Characteristic Curve



/ Package Dimensions

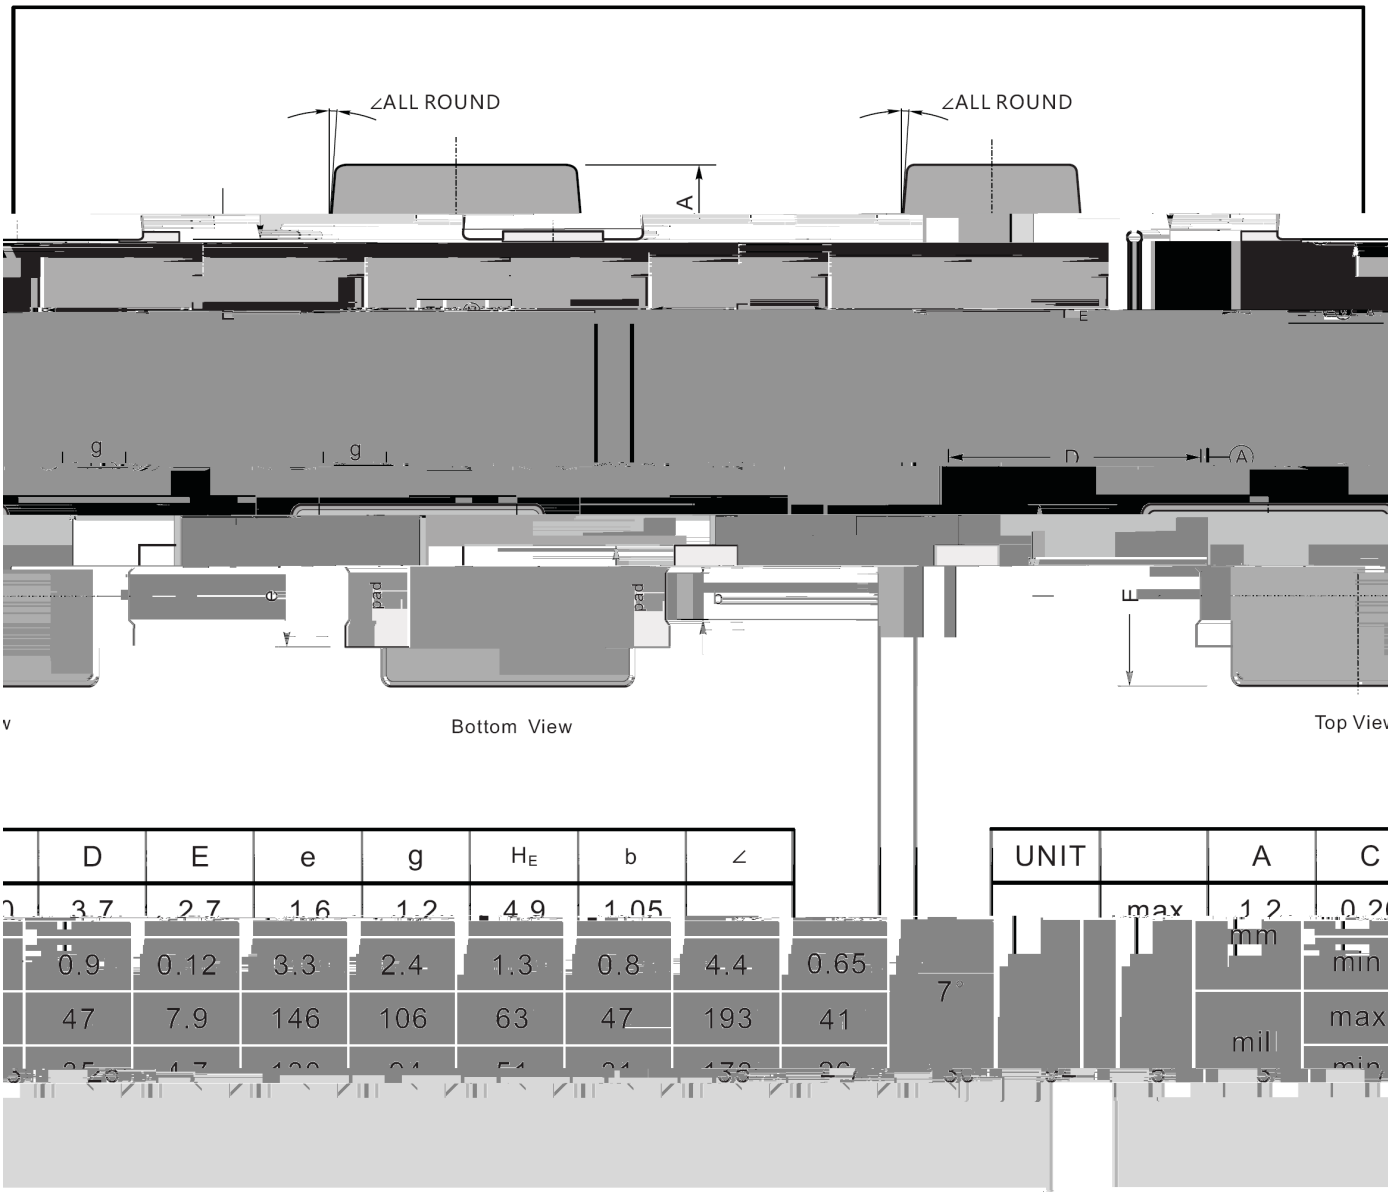


	D	E	e	g	H_E	b	∠
)	3.7	2.7	1.6	1.2	4.9	1.05	
	0.9	0.12	3.3	2.4	1.3	0.8	4.4	0.65	7°
	47	7.9	146	106	63	47	193	41	

UNIT		A	C
	max	1.2	0.2
mm			min
mil			max
			min

/ Marking Instructions



/ Marking Instructions

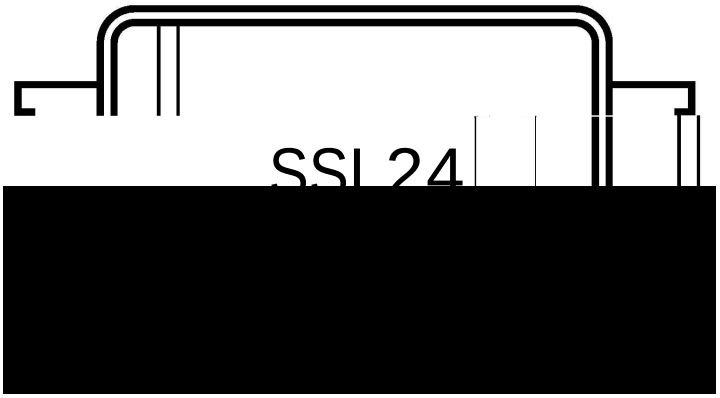


SSL24

**** 1 * 3 *

SSL24

**** * *

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

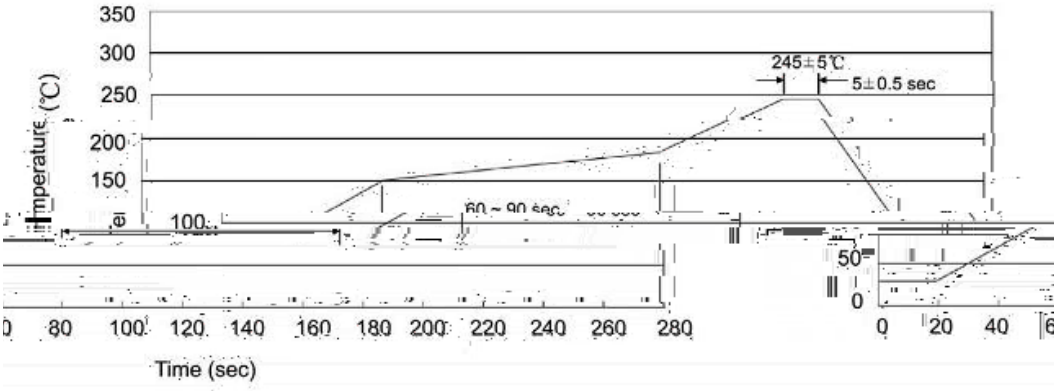

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices