## 5 é / Descriptions

n µ É xRK Ô Â … v 8 â ’ k F g 9 y < k 3 g v y ' k 9 3 ( / xož

Surface Mount Schottky Barrier Rectifiers, Reverse Voltage y 40V,Forward Current: 3.0A ,SMB package.

## ¤ ª / Features

z ô k ä | ä k ä 3 g ~ … v k n µ É x k —)í D }ož

Low power loss, High efficiency, High forward surge current capability, For surface mounted applications, HF Product.

## Ð ÷ / Applications

%² " (ož

General purpose.

## Ã W ] Ô · / Equivalent Circuit




## • Û - æ / Pinning



| PIN | DESCRIPTION |
|---|---|
| 1 | Cathode |
| 2 | Anode |


The recommended mounting pad size

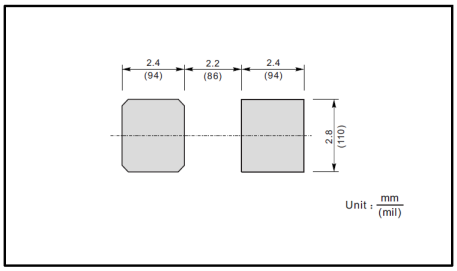



## , M V / Marking

| Type number | Marking |
|---|---|
| SSL34B | SSL34 |


## Ô ? d • Ž ¢ / Electrical Characteristic Curve

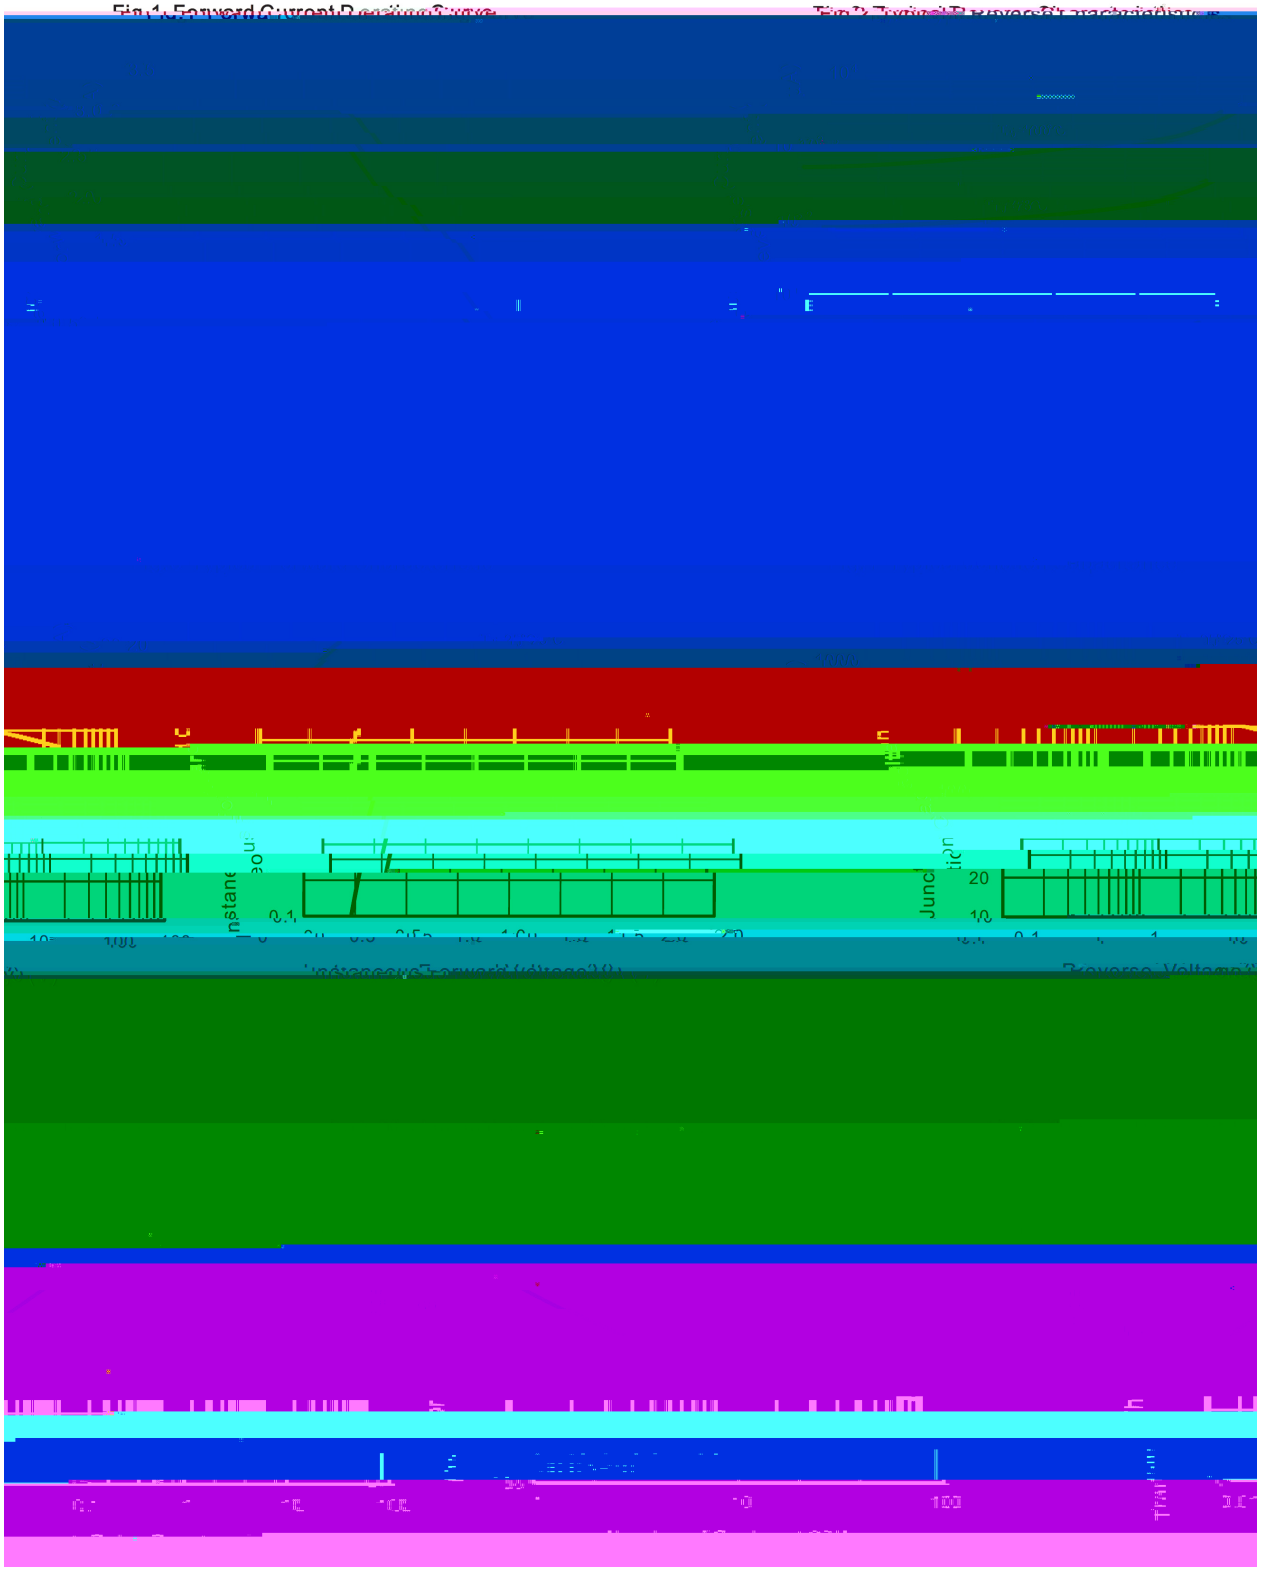

## Ø ¤ = ) ¢ / Package Dimensions

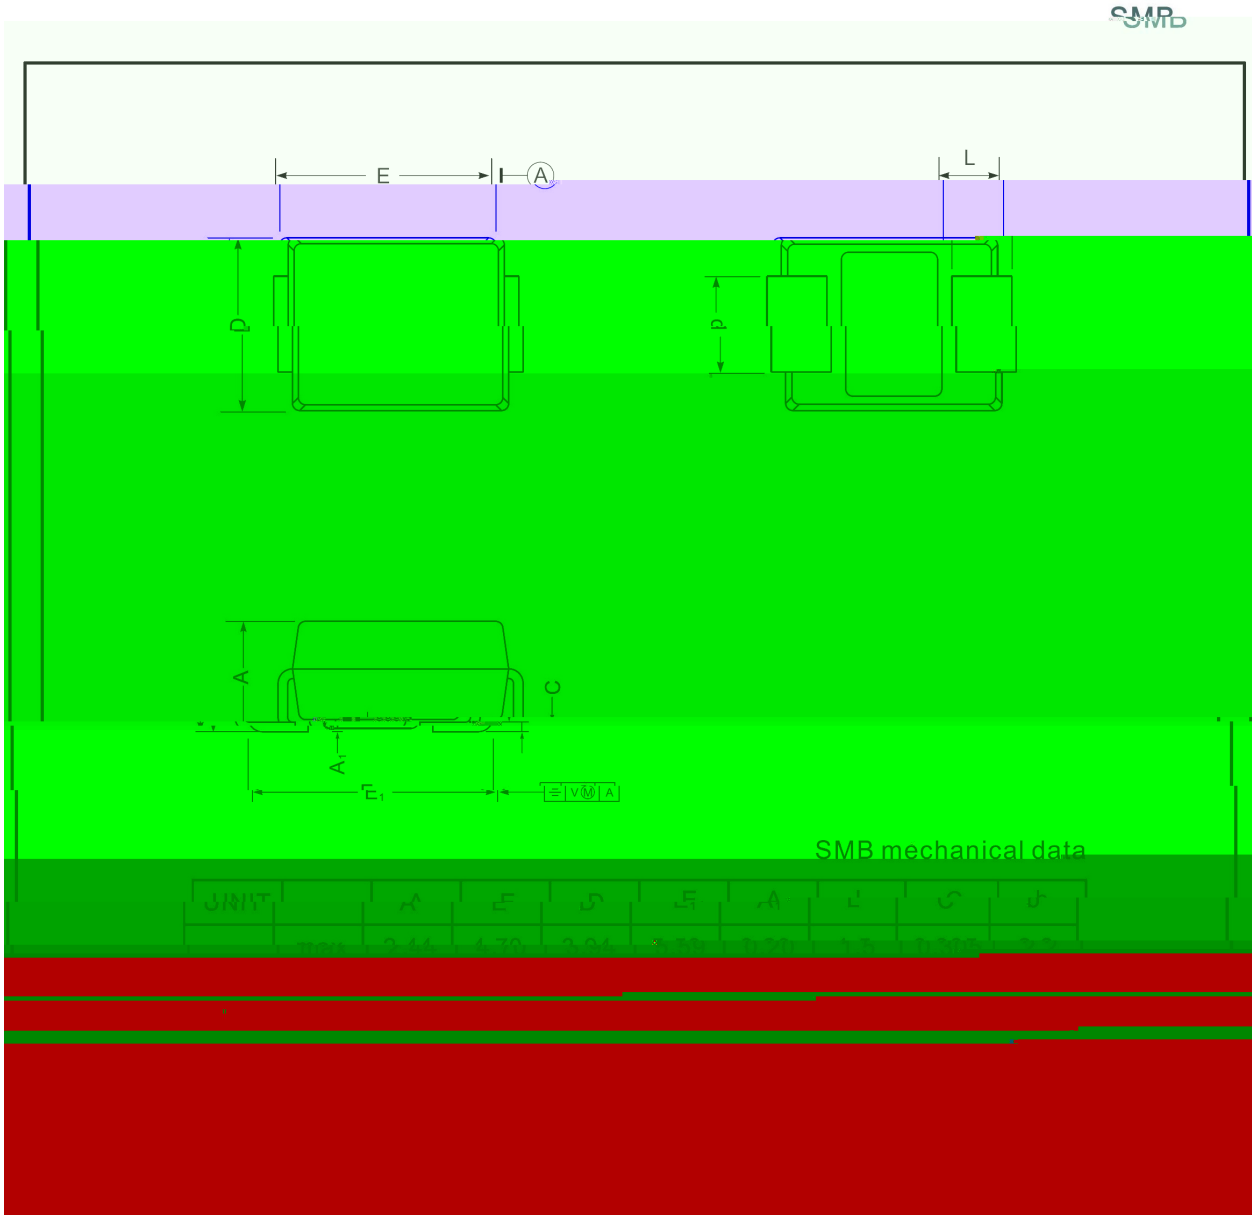

## , M y ƒ / Marking Instructions

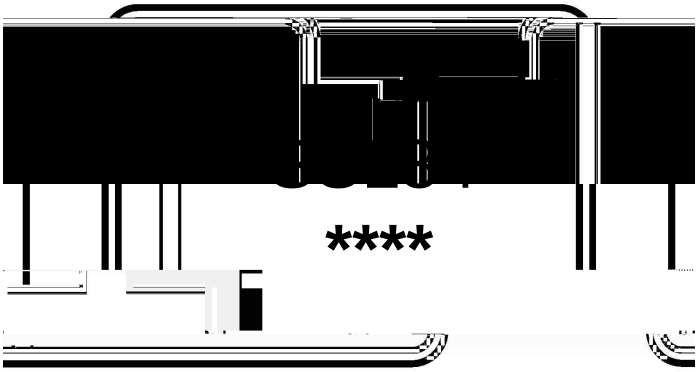


ª ¢ y

9 9 2 y º Z W A

**** y ÿ D Z W A k š ÿ D Z J

Note:

| | |
|---|---|
| 9 9 2 y | Product Type Code |
| **** y | Lot No. Code, code change with Lot No Code |