

40V 5.0A SMA

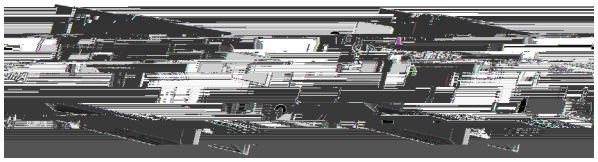

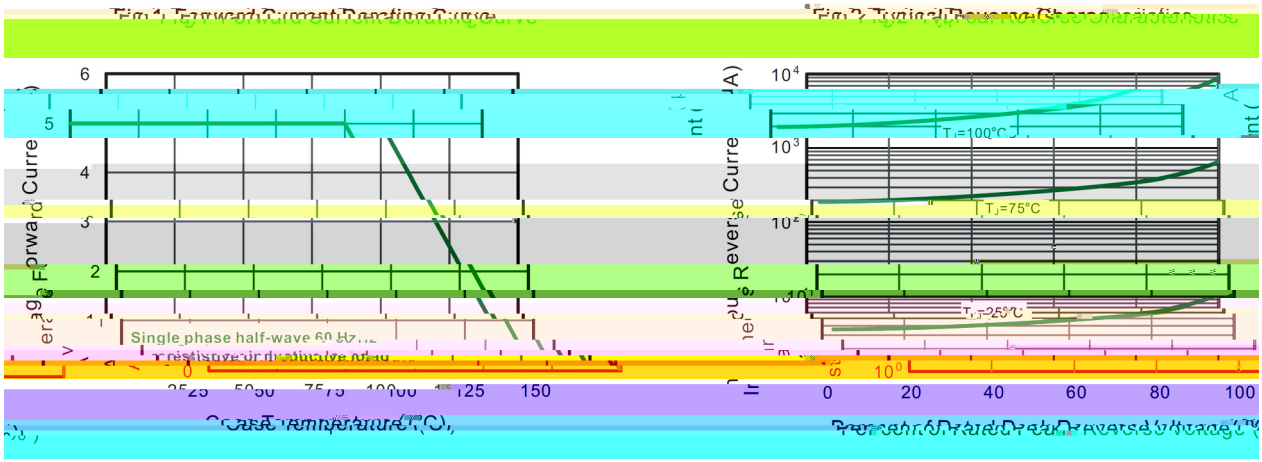

PIN	DESCRIPTION
1	Cathode
2	Anode





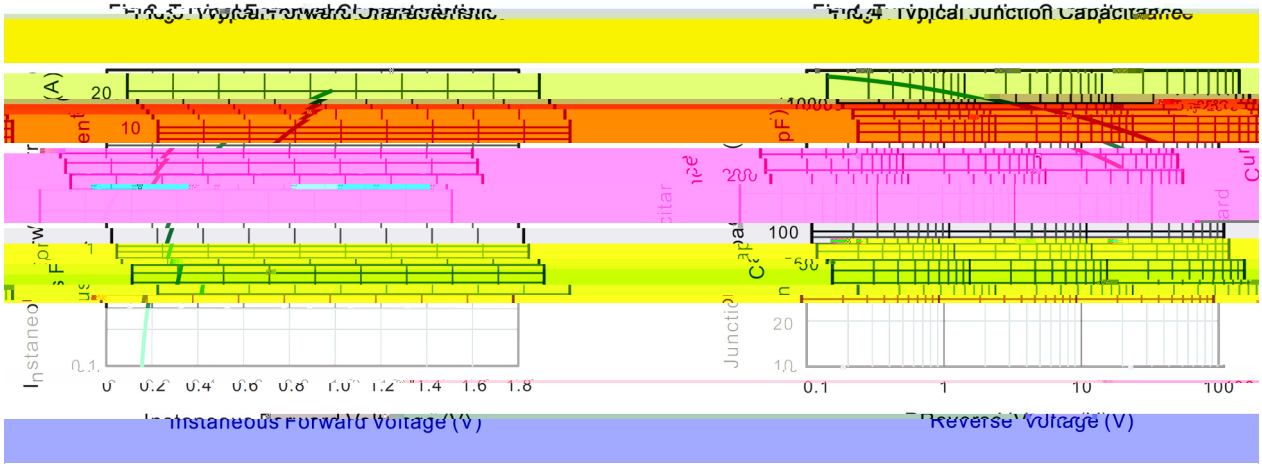


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



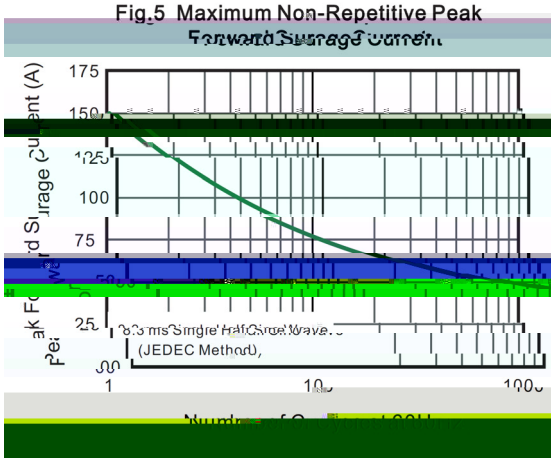


Fig.6- Typical Transient Thermal Impedance

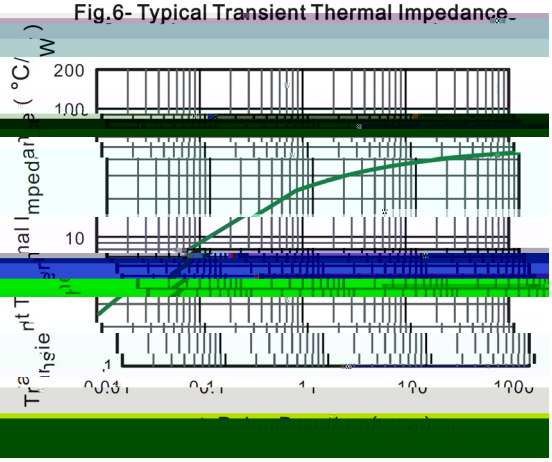

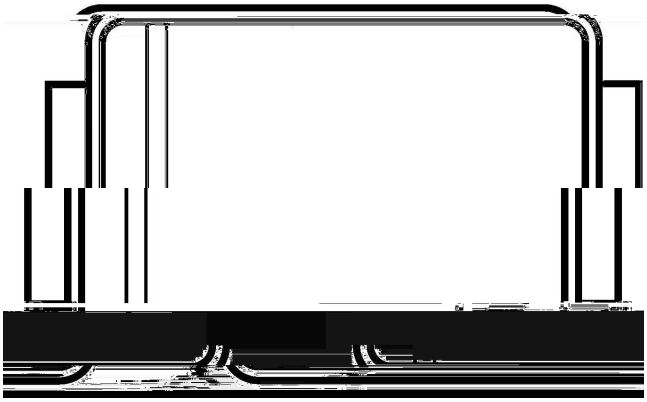

SSL54

SSL54