/ Revised record

A			W01		

60V 5.0A SMBF

Surface Mount Schottky Barrier Rectifier, ReR P /

fier hott k B °

Note:

1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Parameter	Symbol	Test condition	Rating	Unit

/ Electrical Characteristic Curve

Fig.1 Forward Current Derating Curve


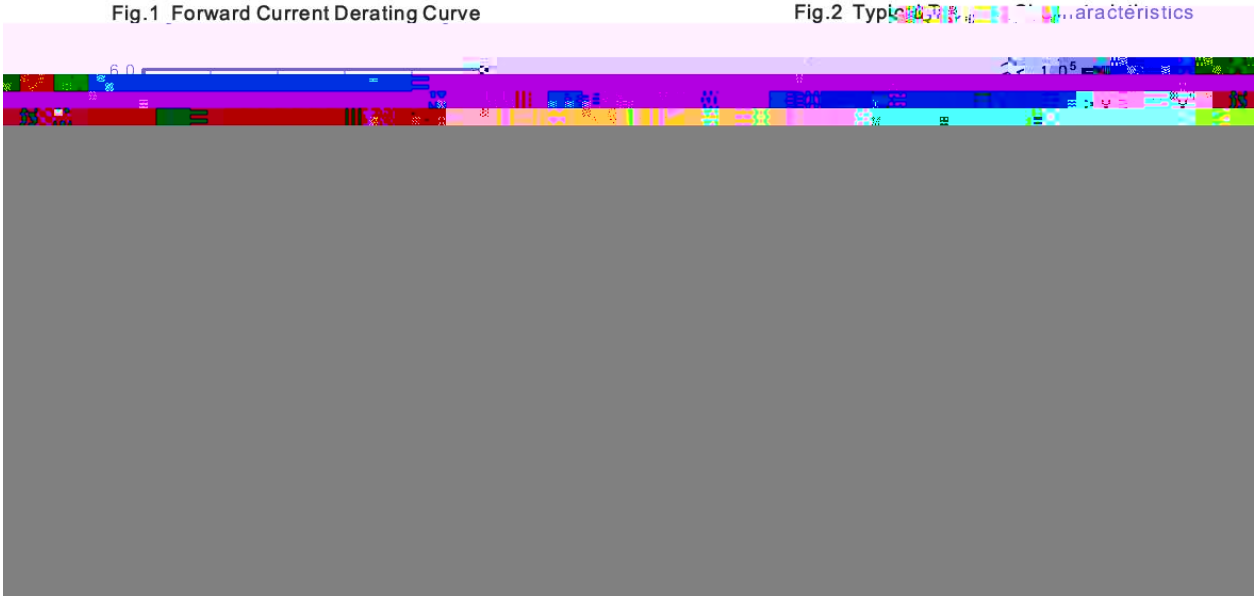


Fig.2 Typical [illegible] Characteristics



/ Marking Instructions

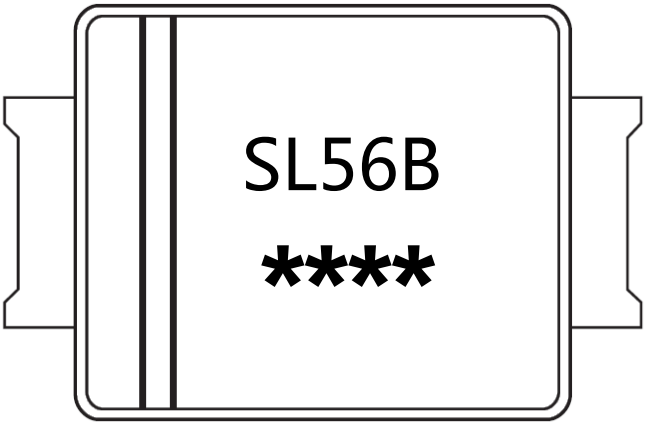

SL56B

**** 1 * 3 *

Note:

SL56B Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No Code