1.5A ABS/LBF
1.5A Surface Mount Glass Passivated Bridge Rectifier, ABS/LBF thin package.


Glass Passivated Chip Junction, Reverse Voltage :100 to 1000V,Forward Current: 1.5A,High Surge Current Capability, Designed for Surface Mount Application. Halogen free product.

General purpose.

ł. ʜ ɔ̇ / Marking


Parameter	Symbol	Rating						Unit
		TB1S-15	TB2S-15	TB4S-15	TB6S-15	TB8S-15	TB10S-15	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}							

≠ ∃ ÃÁE ∀ ƒ / Electrical Characteristic Curve

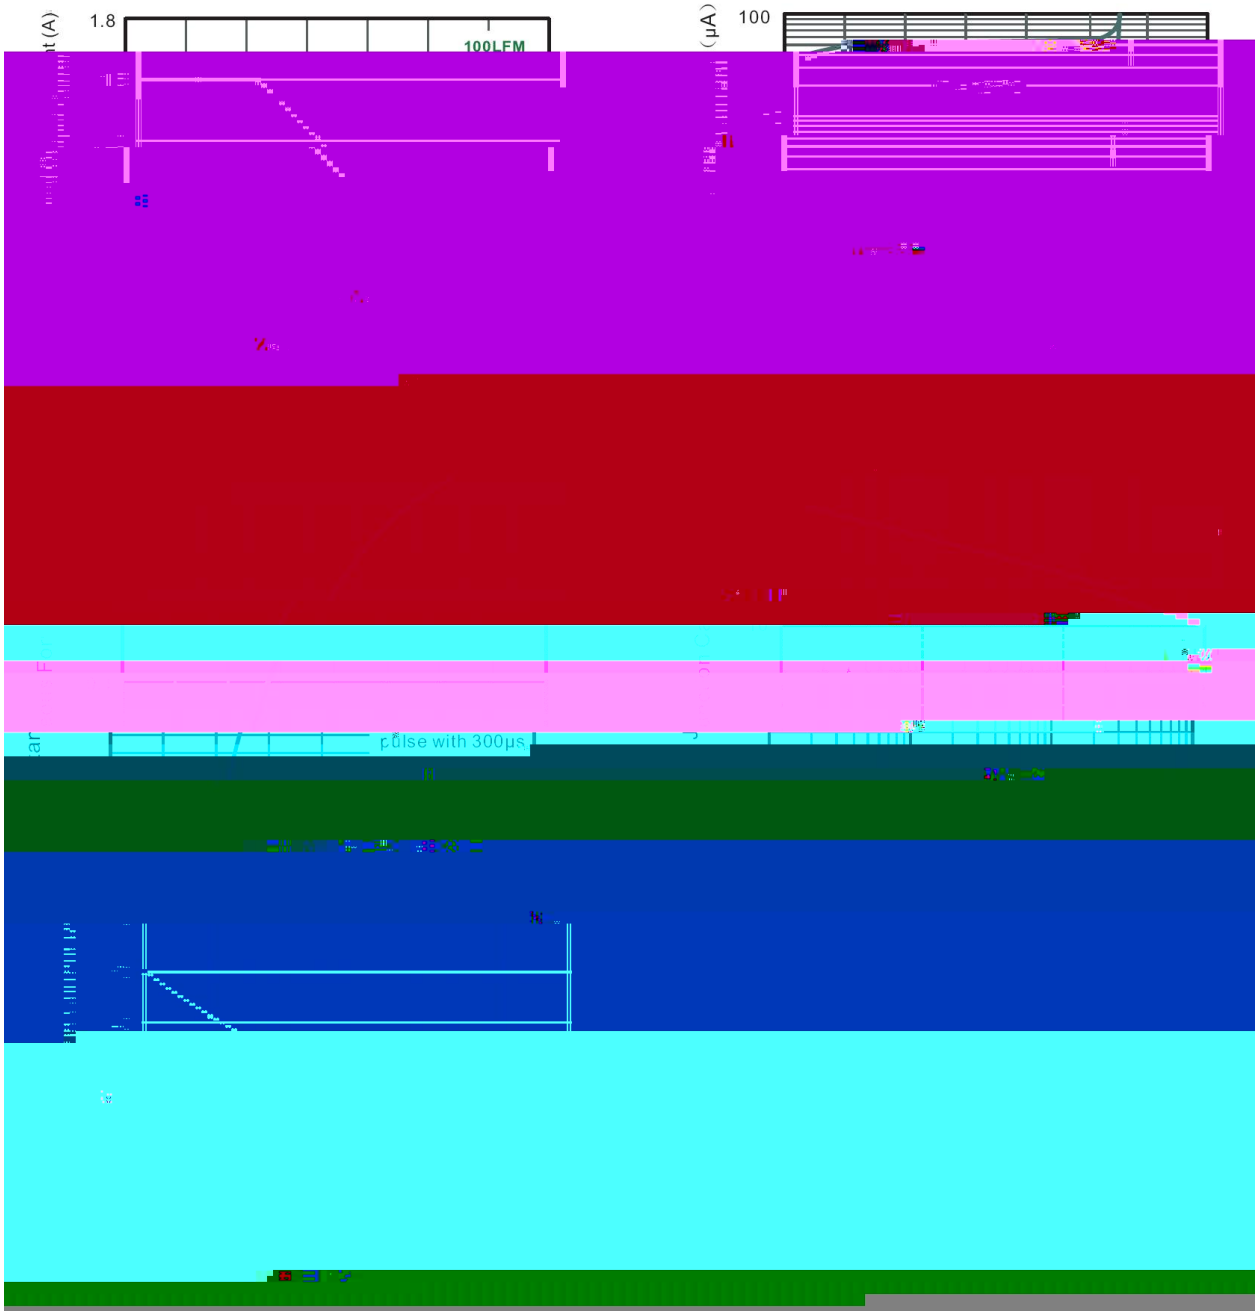

ᵘ Ė Ồ Ļ ʃ / Package Dimensions

ABS/LBF

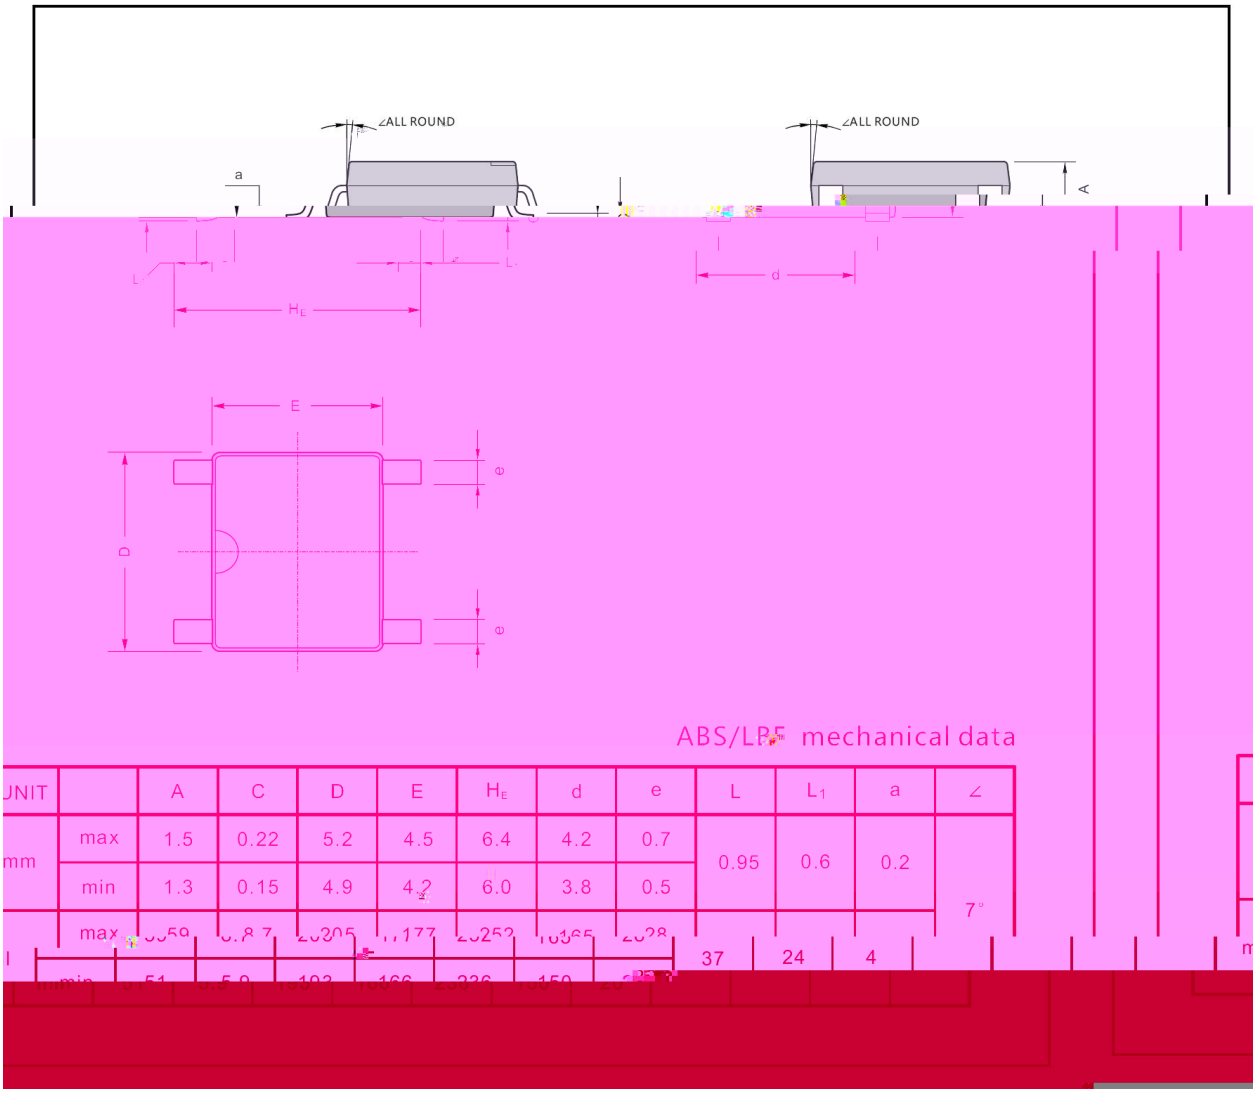


ABS/LBF mechanical data

UNIT		A	C	D	E	H_E	d	e	L	L_1	a	∠
mm	max	1.5	0.22	5.2	4.5	6.4	4.2	0.7	0.95	0.6	0.2	7°
	min	1.3	0.15	4.9	4.2	6.0	3.8	0.5				
	max											
	min											


37 24 4

Ł. Ł Ω / Marking Instructions

Marking

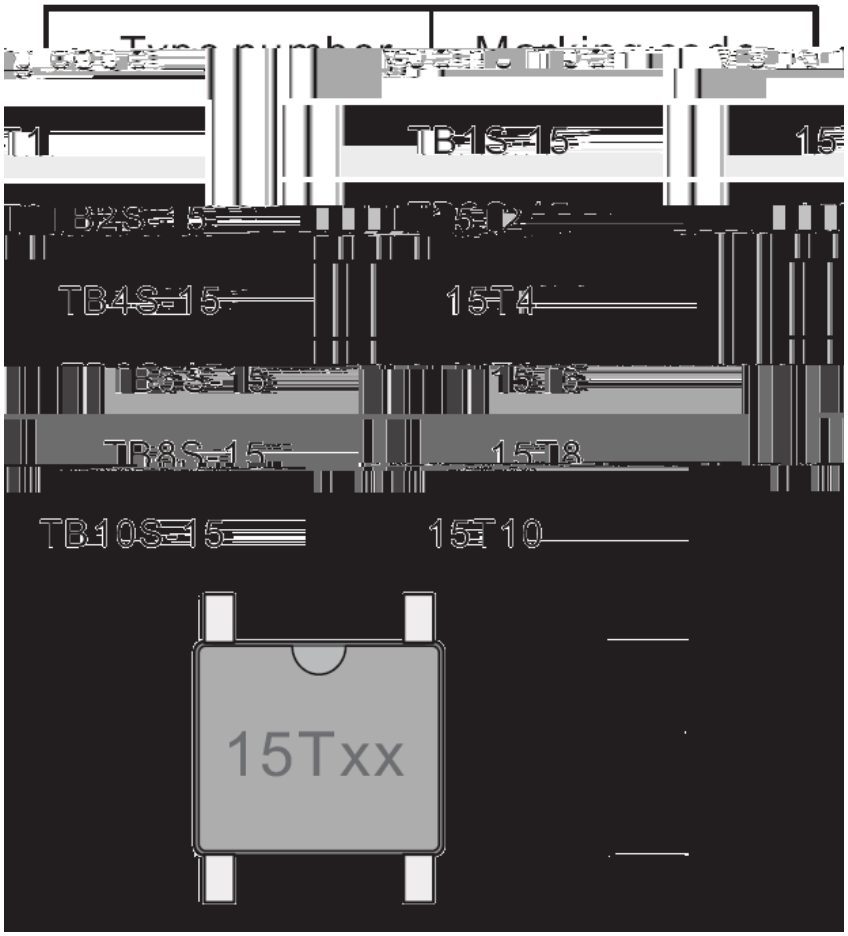

Ł. Ļ Ω / Marking Instructions

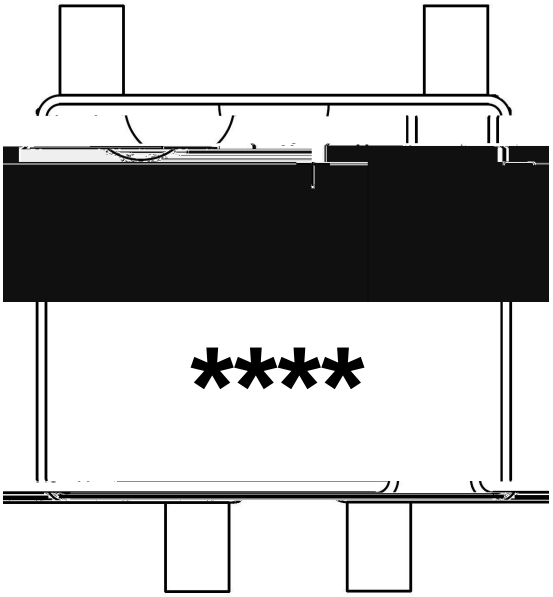

15T1

**** 1 * 3 *

Note:

15T1 Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No Code

ᵻ∫ ╕ẃ´Eᵛ ƒ(ώ૩) / Wh p shudwxuh Suril0h iru LU Uhio r z Vro ghulq j+Se0luhh,

