

WR0553 Ṃ Ṃ Ḅ QSQ Æ Ṁ ч s ‖ ㄱ Silicon NPN transistor in a TO-220 Plastic Package.

лъ WLS65 Ӈ ´
Complement to TIP32.

ᵮ ʌ I ' ㅓ ớ Ầ Ꮒ ѽ ᶻ
Medium power linear switching applications.







PIN1 χ Base PIN 2 χ Collector PIN 3 χ Emitter


See Marking Instructions.

v ˝Ω Parameter	ϒ N Symbol	˝Ω ë Rating				D Ч Unit
		TIP31	TIP31A	TIP31B	TIP31C	
Collector to Base Voltage	V_{CBO}	40	60	80	100	V
Collector to Emitter Voltage	V_{CEO}	40	60	80	100	V
Emitter to Base Voltage	V_{EBO}	5.0				V
Collector Current - Continuous	I_C	3.0				A
Peak Collector Current	I_{CP}	5.0				A
Base Current - Continuous	I_B	1.0				A
Collector Power Dissipation	P_C	2.0				W
Collector Power Dissipation	P_C (Tc=25)	40				W
Junction Temperature	T_j	150				
Storage Temperature Range	T_{sag}	-55 150				

v ˝Ω

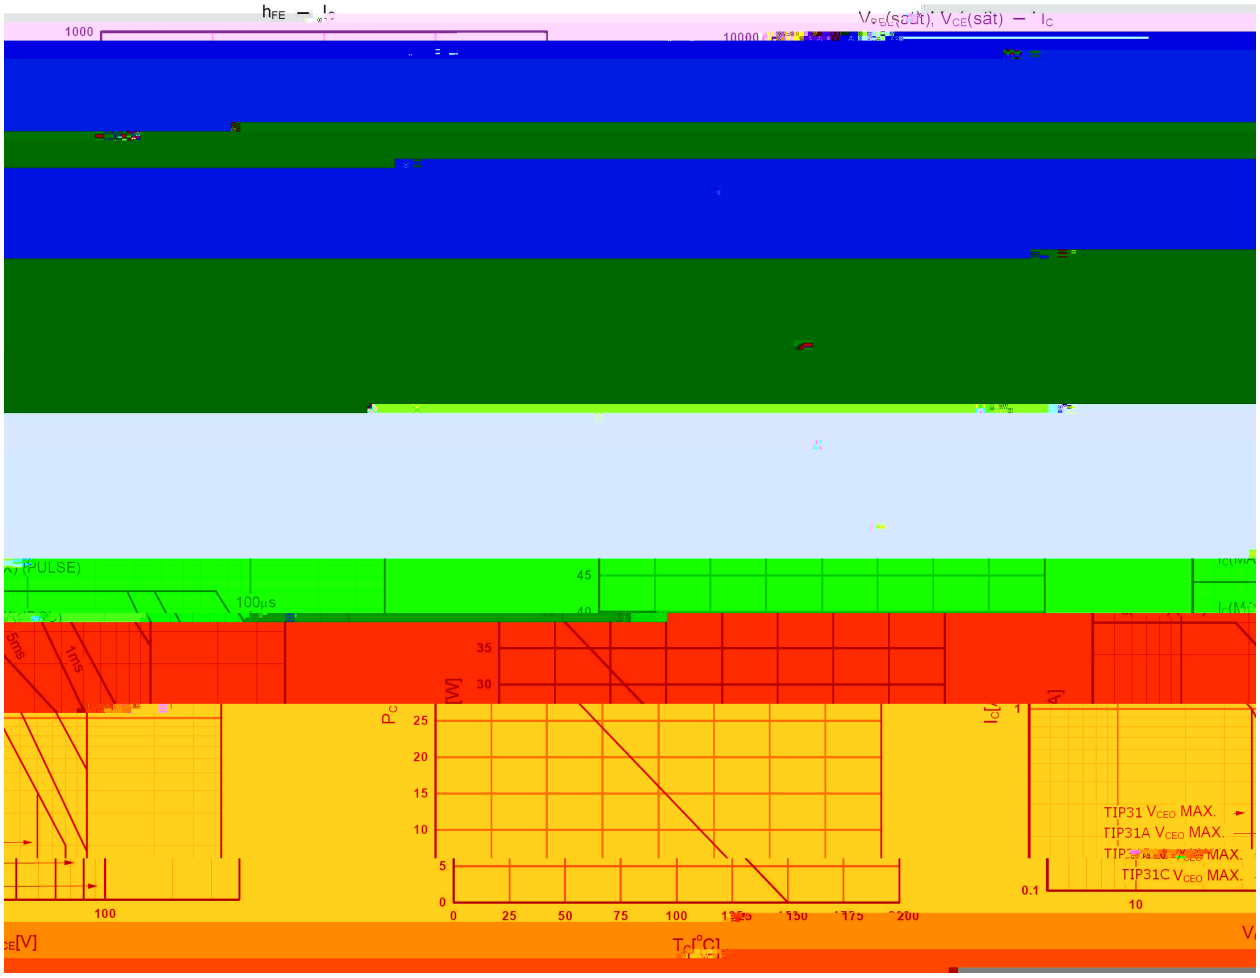
1000
10000
100µs
1ms
5ms
45
40
35
30
25
20
15
10
5
0
0
25
50
75
100
150
175
200
100
1
0.1
10
TIP31 V_{CEO} MAX.
TIP31A V_{CEO} MAX.
TIP31C V_{CEO} MAX.

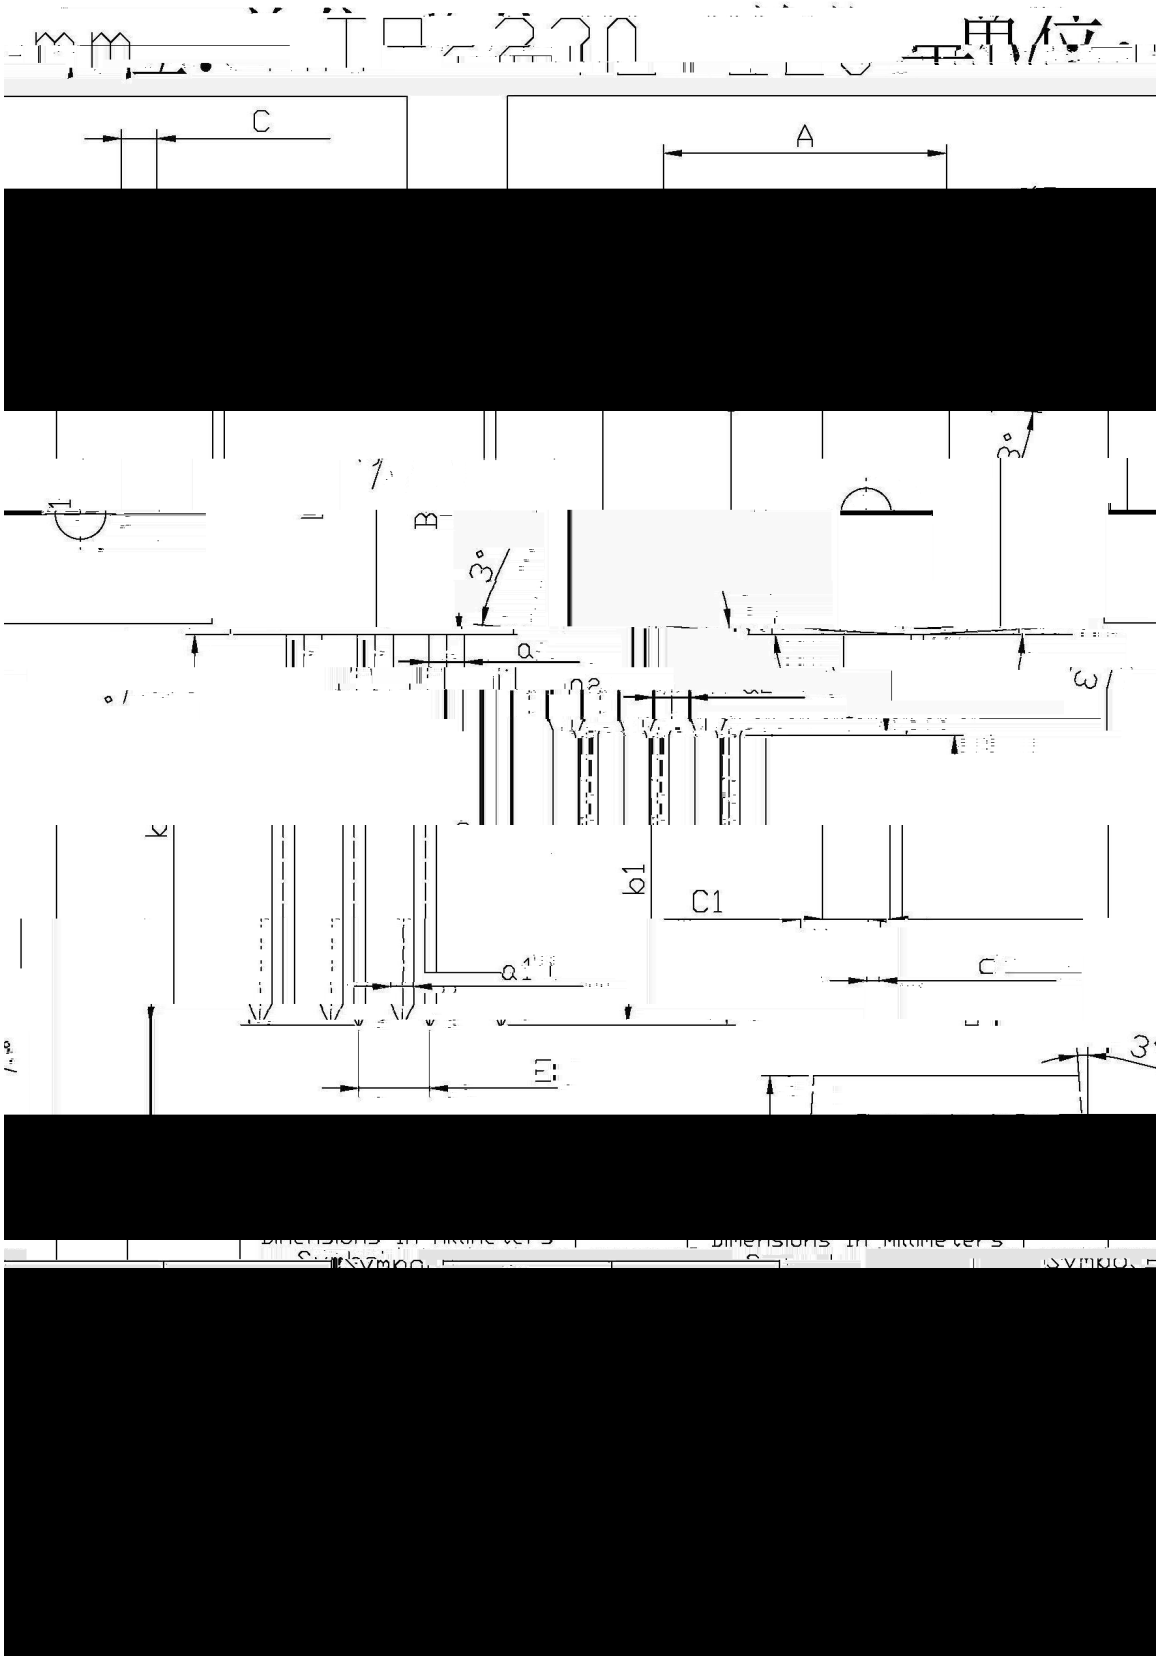
C
A
B
3°
a
b1
C1
a1
E1

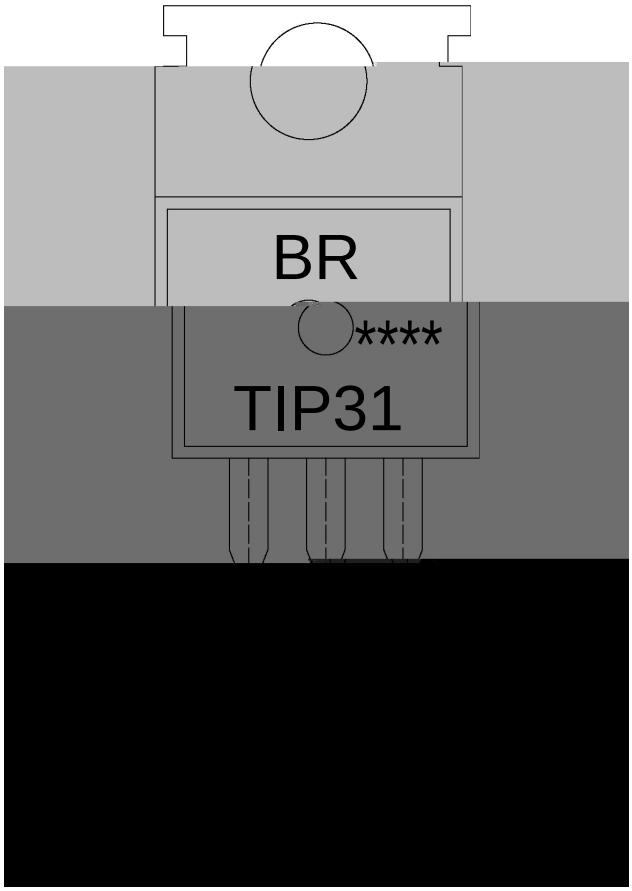

ᴗ ˝ χ

BR χ	ѭ ϗ ᴎ Ꮁ
TIP31 χ	ѭ ғ β ʒ ᴺ
---- χ	ѭ ı ғ ӈ̃ ᴺ Ꮁ ı ϕ ı ғ ӈ̃ ᴺ Ψ ᖘ

Note:

BR:	Company Code
TIP31:	Product Type.
****:	Lot No. Code, code change with Lot No.