
WR0584 ṂṂÞ QSQ ÆṀ ч s ‖ ㄱ Silicon NPN transistor in a TO-251 Plastic Package.

љ WLS75FL Ӈ ´
Complement to TIP42CI.


₹ ₳ I ' ㇔ ό Ầ Ԋ ѽ ᶻ

v ‴Ω Parameter	ϒ N Symbol	‴Ω Ö Rating	D Ч Unit
Collector to Base Voltage	V_{CBO}	100	V
Collector to Emitter Voltage	V_{CEO}	100	V
Emitter to Base Voltage	V_{EBO}	5	V

/ Package Dimensions

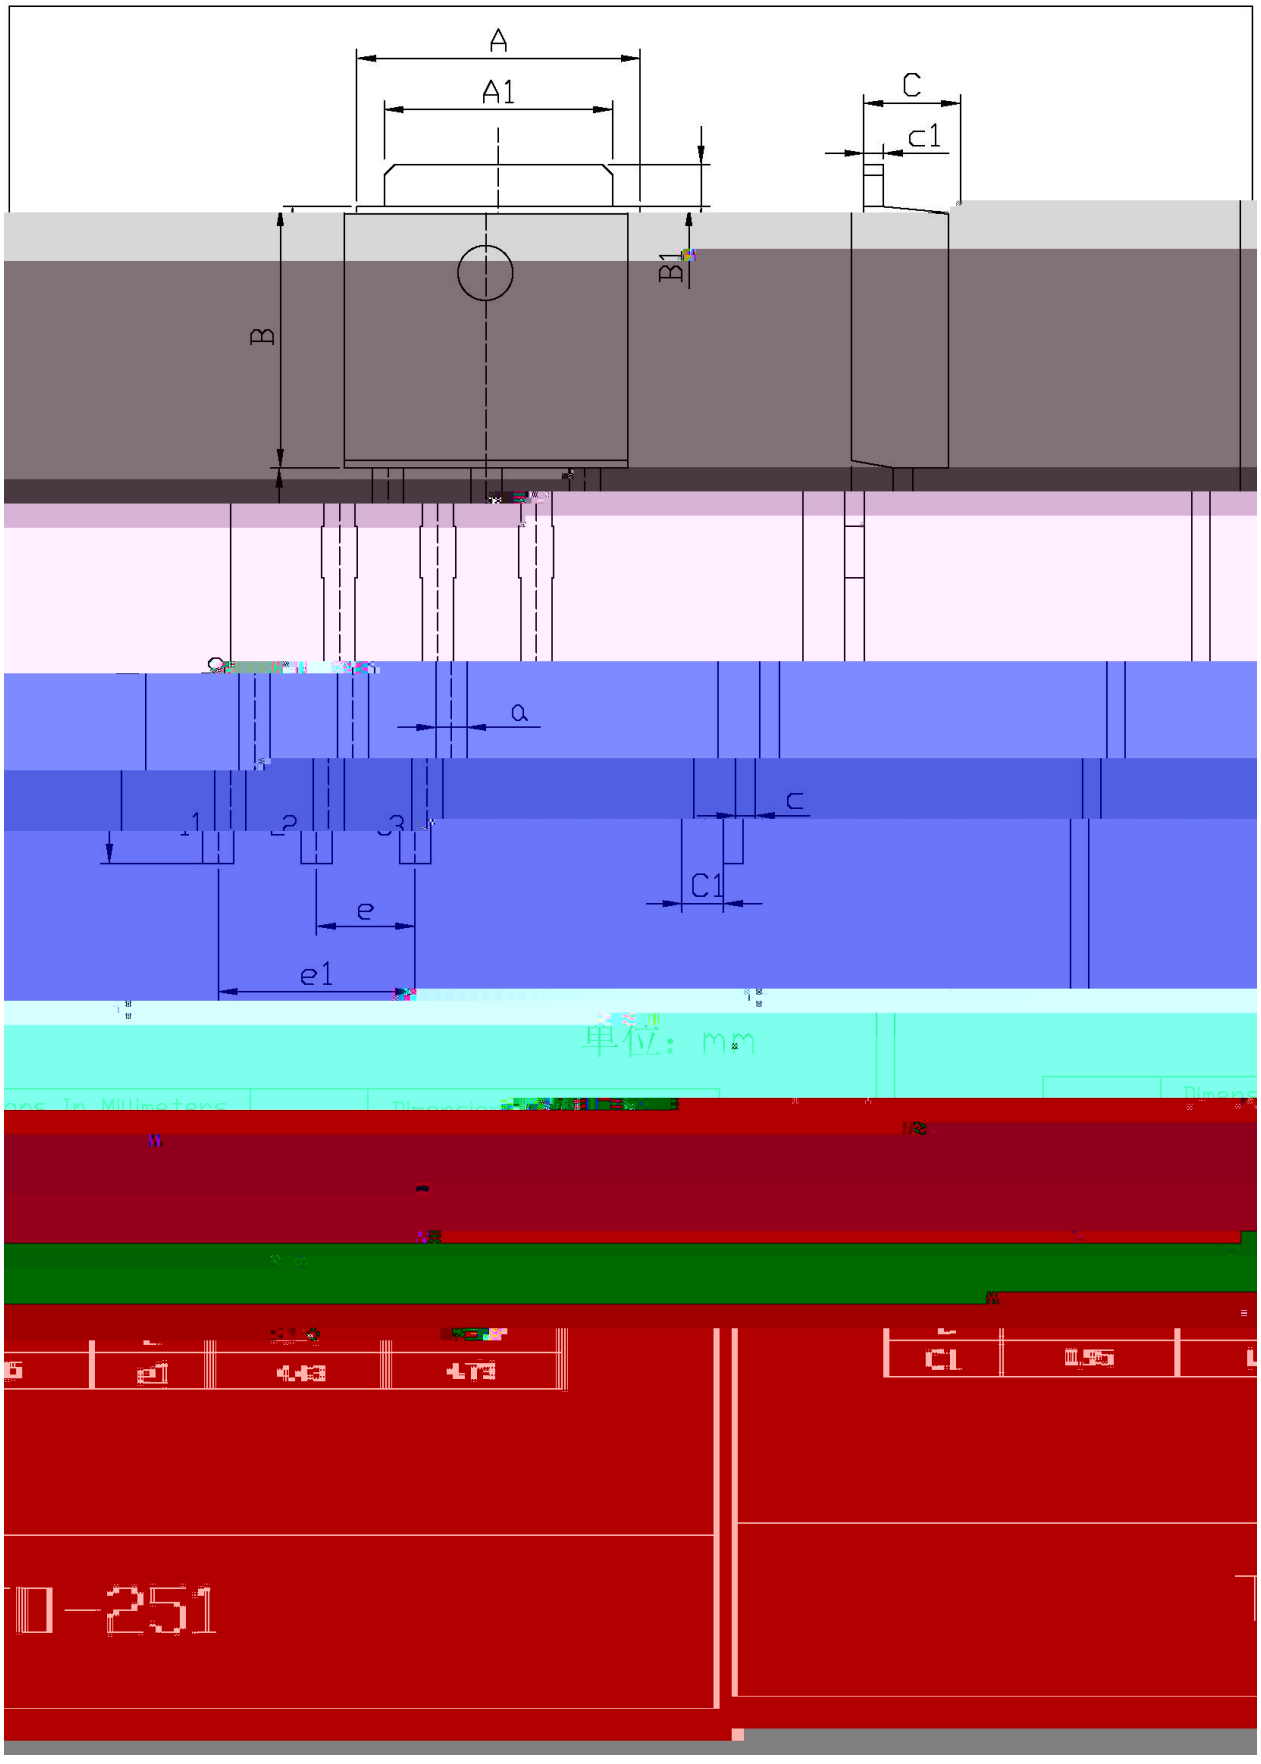

/ Marking Instructions

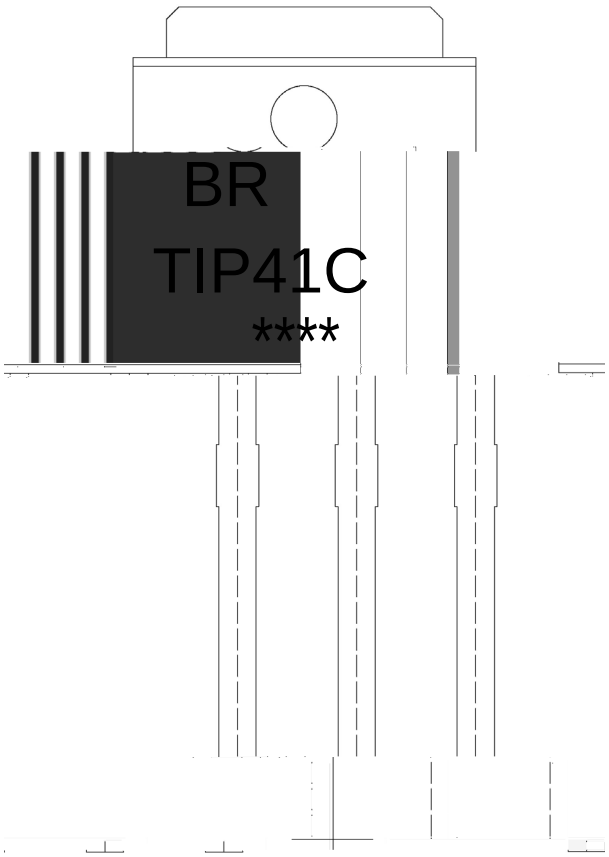


ِ ّ χ	
EU χ	ѭ ϛ и Ђ
WLS74F χ	ѭ ғ β ȝ ɴ
---- χ	ѭ ӏ ғ ӈ̆ ɴ Ђ ӏ ҿ ӏ ғ ӈ̆ ɴ Ψ ҏ

Note:

BR:	Company Code
TIP41C:	Product Type.
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

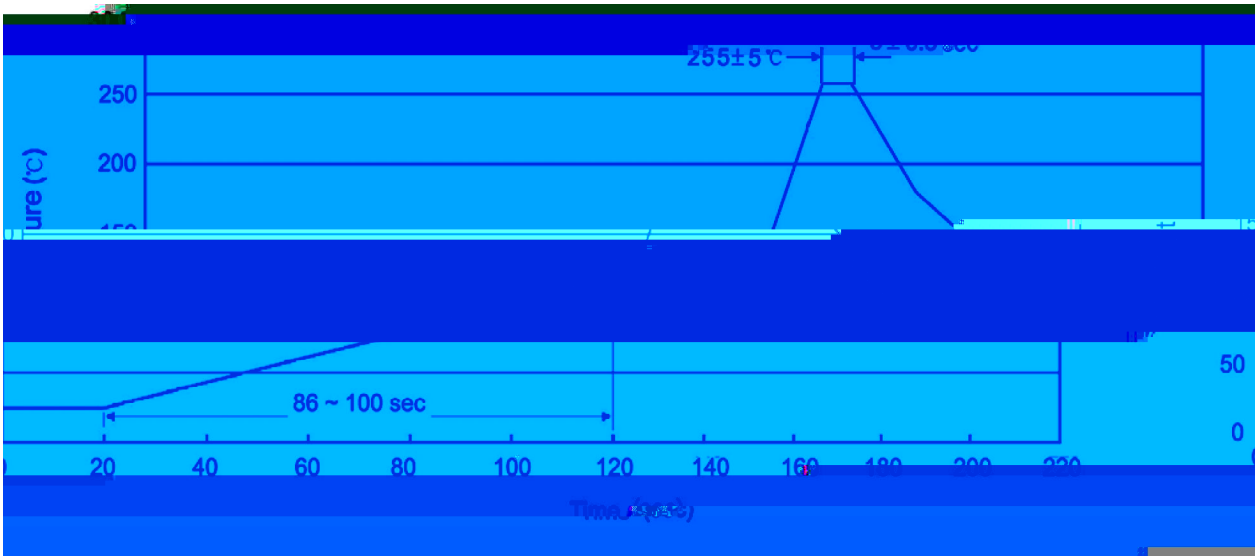

ب ˝ χ

1 Ĺ ♬ □ ỷ 25 Ḱ 150 ł ı ˋH ڑ 60 Ḱ 90sec;

2 Š Ө □ ỷ 255 ° 5 ł ı ˋH ڑ ˋY ﾊ ㎞ 5 ° 0.5sec;

3 ì ˙ ｲ ˛ ɔ ﻉ ỷ ㎞ 2 Ḱ 10 ł /sec.

Note:

1.Preheating:25~150 ł , Time:60~90sec.

2.Peak Temp.:255 ° 5 ł , Duration:5 ° 0.5sec.

3. Cooling Speed: 2~10 ł /sec.

/ Resistance to Soldering Heat Test Conditions

□ ỷ χ 270 ° 5 ł ˋH ڑ χ 10 ° 1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

ˈQ ţ ｙ Ł / BULK

Package Type	Units					Dimension		(unit mm³)
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-251	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195

˛ ｱ ｙ Ł / TUBE

Package Type	Units	Dimension	(unit mm³)
	Units/Tube /		