Rev.C Jun.-2024

Note:

Parameter	Symbol	Rating							Unit
		7561A(f=1.0	7512B	7599	8108	3710Measu	8165	5717	1 -1.1467 19J2

(1) P.C.B. mounted with 2.0 X 2.0" (5 X 5 cm) copper pad areass.

(2) Measured at 1 MHz and applied reverse voltage of 4 V D.C.

Parameter	Symbol	Test condition	Rating							Unit
			US1A	US1B	US1D	US1G	US1J	US1K	US1M	
Maximum Instantaneous Forward Voltage	V_F	I_F=1.0A	1.0			1.3	1.65			V
Maximum DC Reverse Current at Maximum DC Blocking Voltage	I_R	T_a=25	5.0							uA
		T_a=125	100							
Maximum Reverse Recovery Time	T_{rr}	I_F=0.5A I_R=1.0A I_{rr}=0.25A	50				75			ns

Fig.1 Forward Current Derating Curve

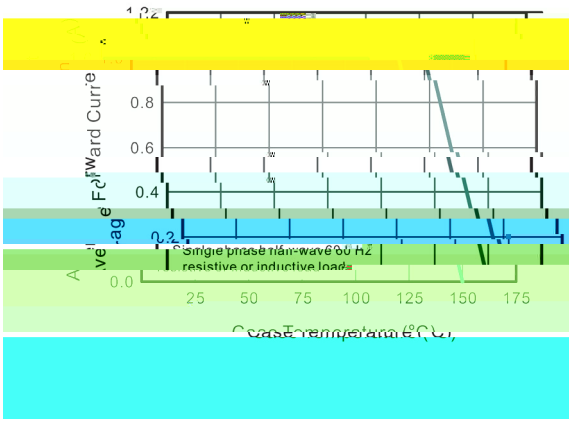


Fig.2 Typical Reverse Characteristics

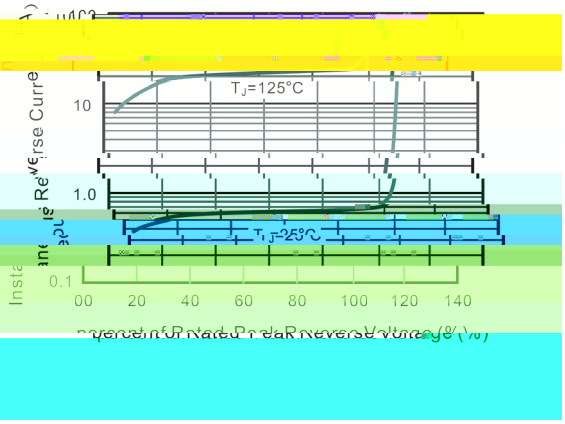


Fig.3 Typical Forward Characteristics

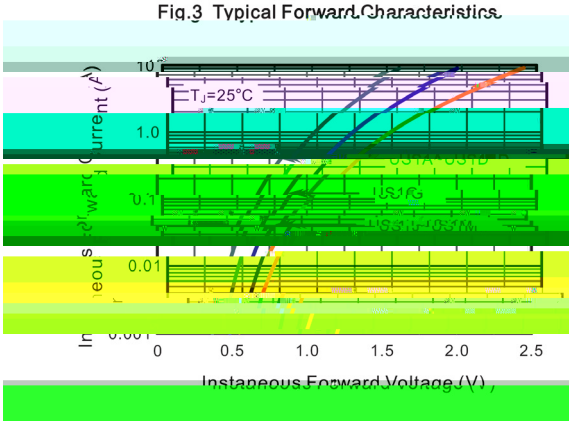


Fig.4 Maximum Non-Repetitive Peak Forward Surage Current

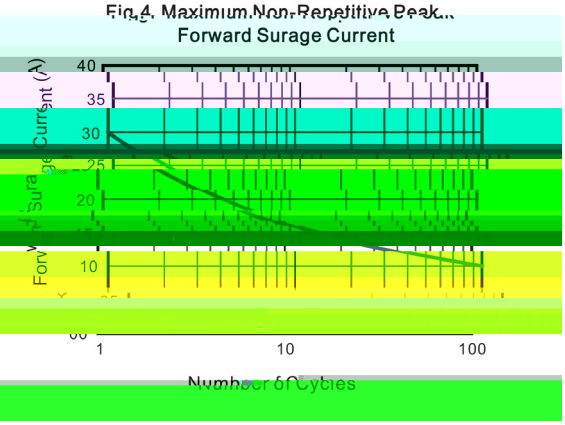


Fig.5- Typical Transient Thermal Impedance



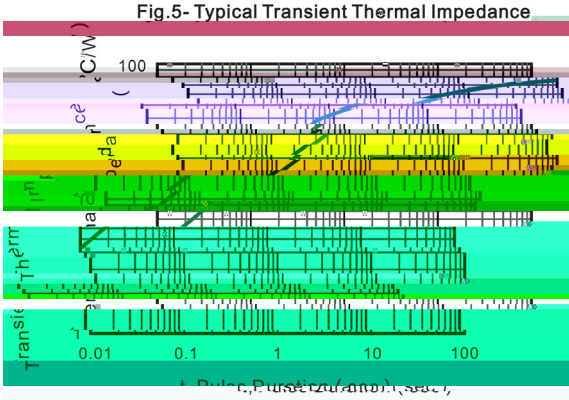


Fig.6 Typical Junction Capacitance



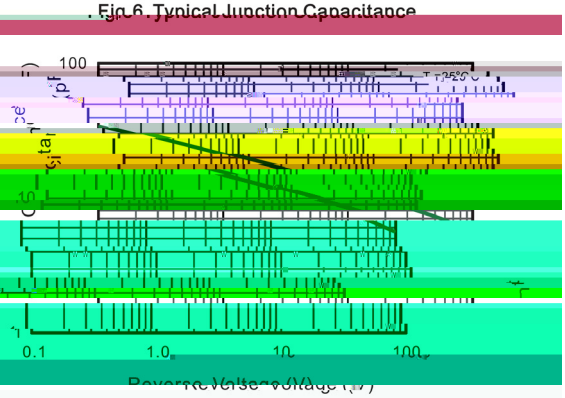

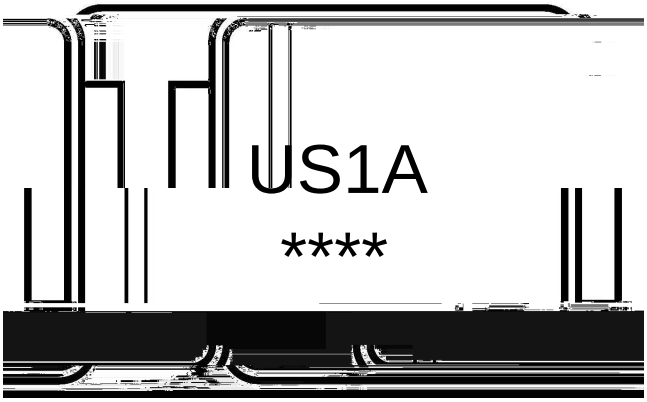

XV4D


Note:

XV4D Product Type Code

Lot No. Code, code change with Lot No

Type number	Marking code
US1A	US1A
US1B	US1B
US1D	US1D
US1G	US1G
US1J	US1J
US1K	US1K
US1M	US1M

Temperature Profile for IR Reflow Soldering(Pb-Free)

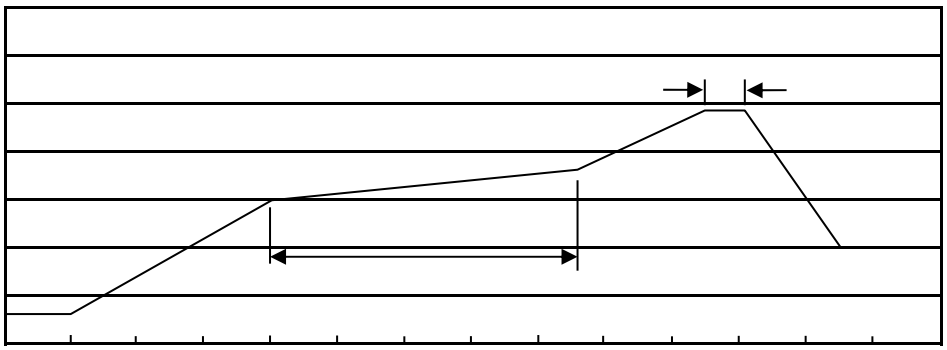

		Note:
1	150 180 60 90sec;	1.Preheating:150~180 , Time:60~90sec.
2	245±5 5±0.5sec;	2.Peak Temp.:245±5 , Duration:5±0.5sec.
3	2 10 /sec.	3. Cooling Speed: 2~10 /sec.

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ REEL

Package Type	Units					Dimension		(unit mm³)
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SMA	5,000	2	10,000	7	70,000	13 ×12	336×336×40	380×335×366