/ Descriptions

ʌ ȏ Õ ʯ ‾ ǁ ˥ ı ɾ ᵇ ɔ я χ 83Y¢4333Y ı* ᵇ ɔ ǁ χ 513D ı V P D Ṃ Ꝉ

/ Features

ד א ק ƀ ↀ ı ѽ ' ב ı ṅ ﬠ ו ᵀ ﬗ ` UrKV ˝Yɒ 53442982HX ı گ ̂ ̃ ˷ ˍ Ꝉ ṅ ꜰ β

0


/ Applications

˜ ɾ ∪1

/ Equivalent Circuit




/ Pinning

1 

2

PIN	DESCRIPTION
1	Cathode
2	Anode


The recommended mounting pad size

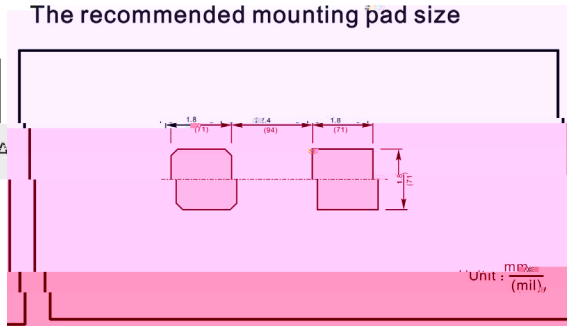


/ Marking


ȣ ᴍ ↿ ب ˝

/ Electrical Characteristic Curve

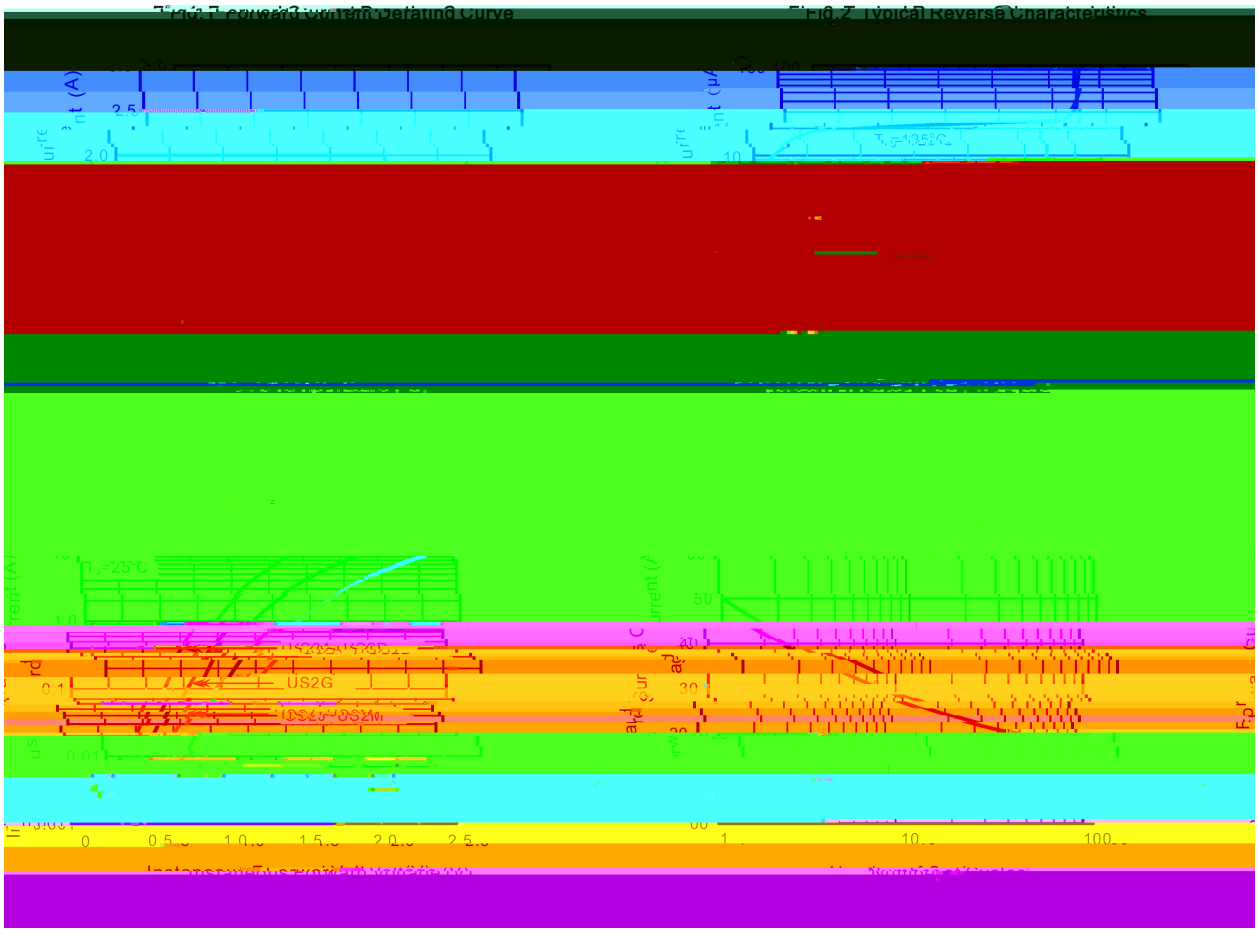

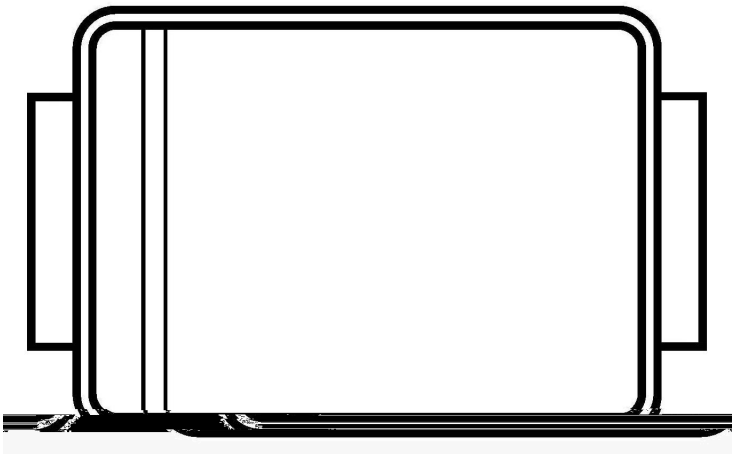

( ) /

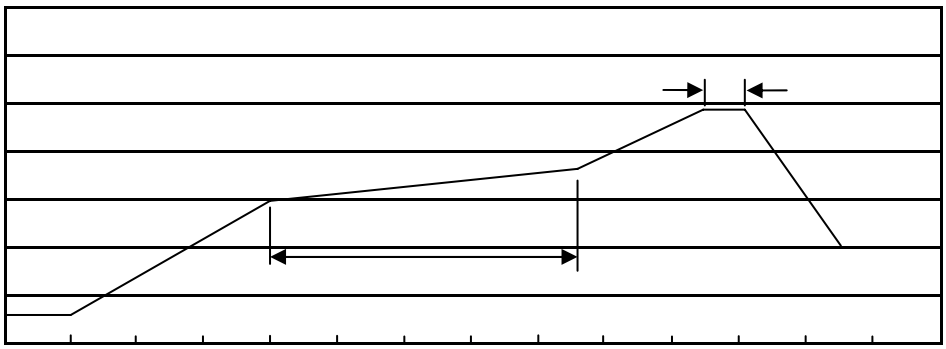

ب ˝ χ

Ĺ ♬ □ ỷ Ќ ɬ ı ʿH ژ Ќ ɬ

Š Ө □ ỷ ° ɬ ı ʿH ژ ʿY ʌ ѭ ° ° ɬ °

ì ˙ ϒ ˛ ɔ ѡ ỷ ѭ Ќ ɬ ɬ

/ Resistance to Soldering Heat Test Conditions

□ ỷ χ ° ɬ ʿH ژ χ ° ° ɬ °

/ Packaging SPEC.

ɔ ` ɣ Ł

/ Notices