/ nsDeiscri

WR0553 ṂṂ Ł SQS ÆṀ ч s ‖ ㄱ Silicon PNP transistor in a TO-220 Plastic Package.

/ Features

ɡ ‖ 0 ∧ ṃ ‖ ֆ õ˜ ヽ[OBJ]ɔ ڳ ´ ㄴ ч ` ぇ ЛЬ WLS475W ٮḾ


Monolithic construction with built in base-emitter shunt resistors, High DC current gain complement to TIP142T.

/ Applications


[illegible] Ṫ ў ѡ ʜ [OBJ]ㅓ ớ Ầ ʜ ڍ Ѿ

Linear and switching industrial equipment.

/ Equivalent



g hi Pi



PIN1 χ Base PIN 2 χ Collector χ Emitter PI7T3

/ h_{FE} Classifications & Marking

ð м ヽ ب ˝ See Marking Instructions.


/ Absolute Maximum Ratings(Ta=25)


v ̈Ω Parameter	ϒ N Symbol	̈Ω Ö Rating	D Ꮋ Unit
Collector to Base Voltage	V_{CBO}	-100	V
Collector to Emitter Voltage	V_{CEO}	-100	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-10	A
Peak Collector Current	I_{CP}	-15	A
Base Current - Continuous	I_B	-0.5	A
Collector Power Dissipation	P_C(T_C=25)	80	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	


/ Electrical Characteristics(Ta=25)

v ̈Ω Parameter	ϒ N Symbol	⅄ ː ̊ ţ Test Conditions	ѡ ṇ Ö Min	Ɛ ʒ Ö Typ	ѡ ᶻ Ö Max	D Ꮋ Unit
Collector to Emitter Breakdown Voltage	V_{CEO}	I_C=-30mA I_B=0	-100			V
Collector Cut-Off Current	I_{CEO}	V_{CE}=-50V I_B=0			-2.0	mA
Collector Cut-Off Current	I_{CBO}	V_{CB}=-100V I_E=0			-1.0	mA
Emitter Cut-Off Current	I_{EBO}	V_{EB}=-5.0V I_C=0			-2.0	mA
DC Current Gain	$h_{FE(1)}$	V_{CE}=-4.0V I_C=-5.0A	1000			
	$h_{FE(2)}$	V_{CE}=-4.0V I_C=-10A	500			
Collector to Emitter Saturation Voltage	$V_{CE(sat)(1)}$	I_C=-5.0A I_B=-10mA			-2.0	V
	$V_{CE(sat)(2)}$	I_C=-10A I_B=-40mA			-3.0	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	I_C=-10A I_B=-40mA			-3.5	V
Base to Emitter Voltage	V_{BE}	V_{CE}=-4.0V I_C=-10A			-3.0	V
Delay Time	t_D	V_{CC}=-3V I_C=-5A I_{B1}=-20mA I_{B2}=20mA R_L=6Ω		0.15		μs
Rise Time	t_R			0.55		μs
Storage Time	t_{STG}			2.5		μs
Fall Time	t_F			2.5		μs


/ Electrical Characteristic Curve

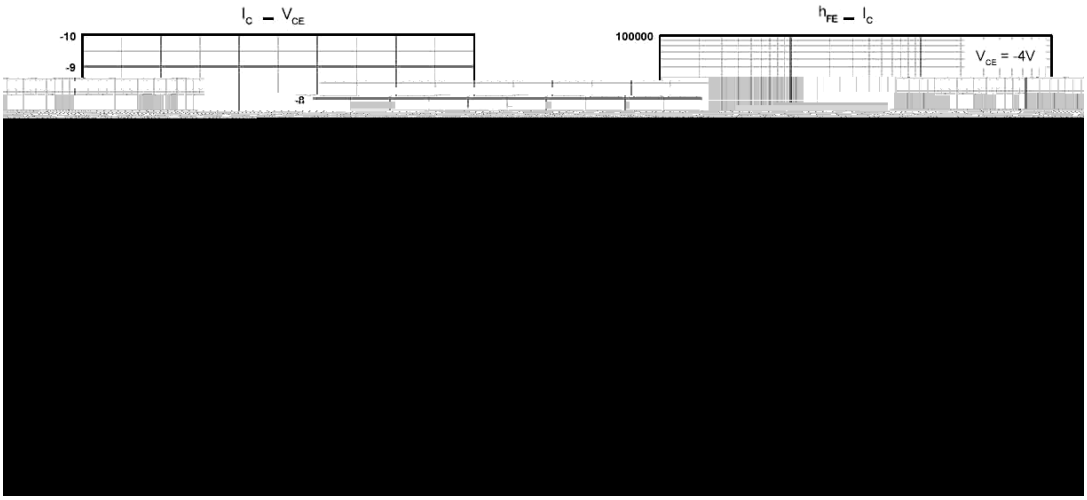

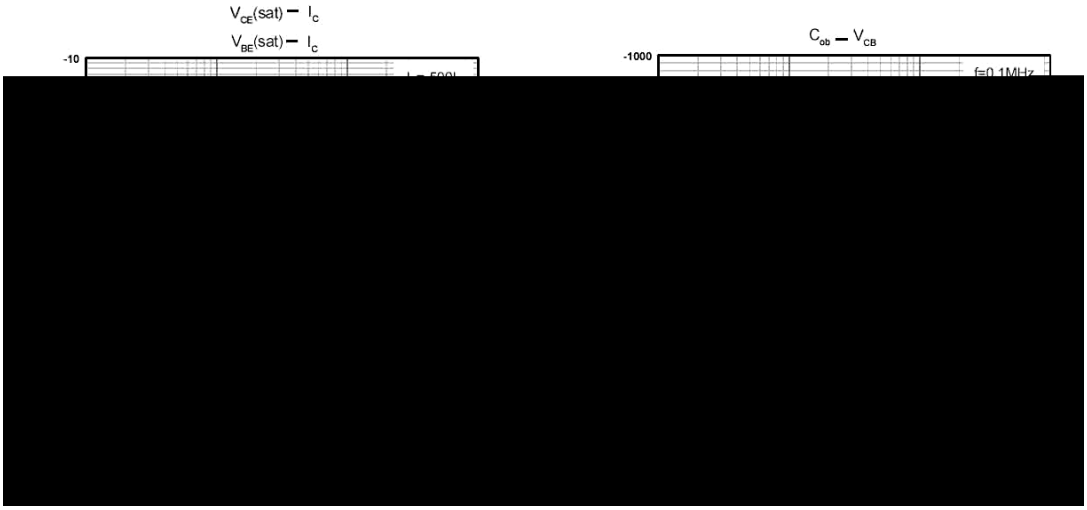


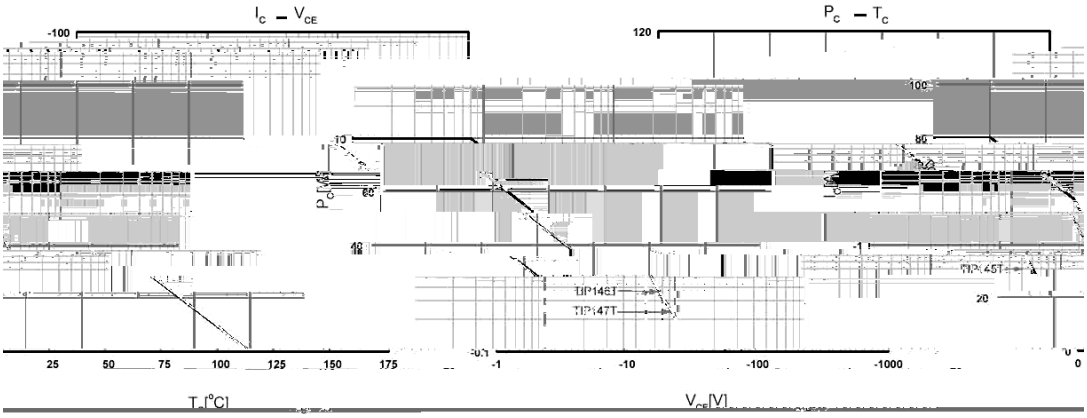

/ Package Dimensions

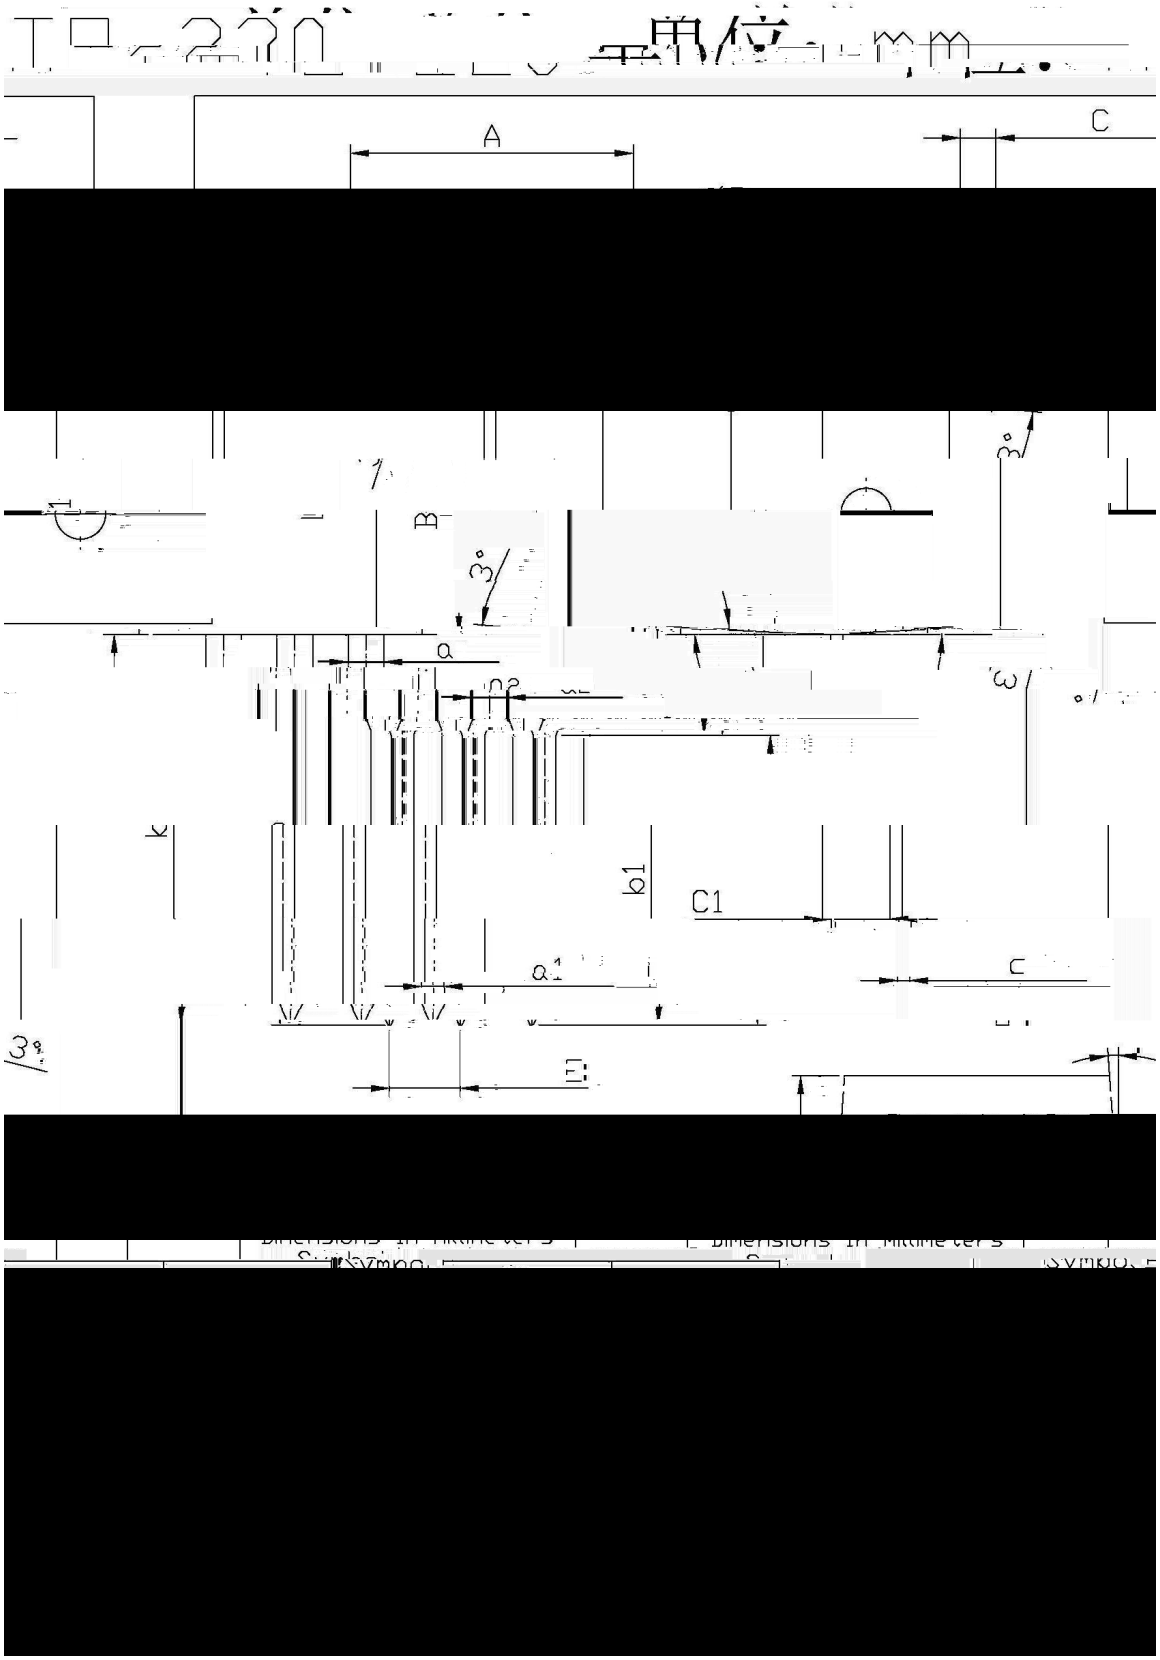

/ Marking Instructions

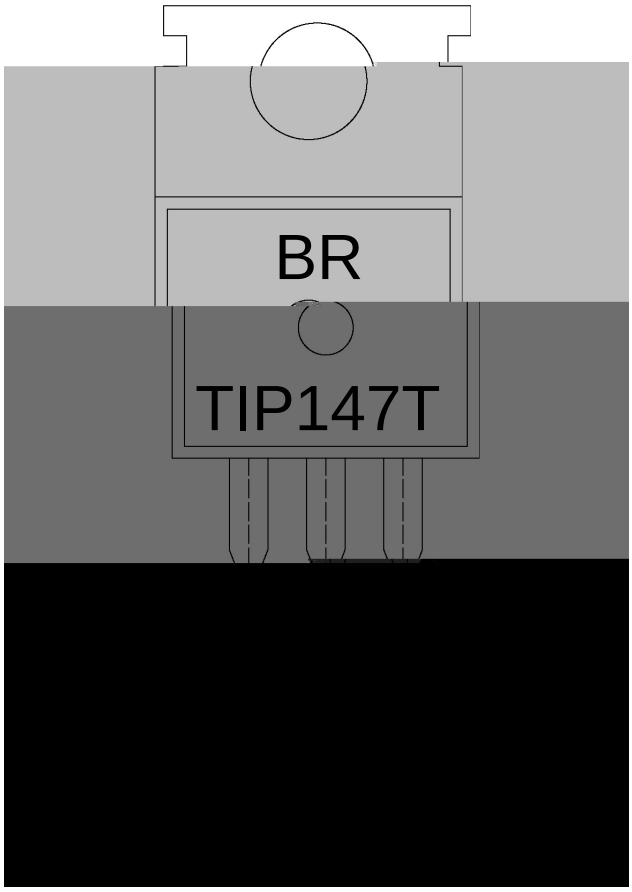

ب ˝ χ	
EU χ	ⅷ ϛ ᴎ Ꮁ
WLS47 : W χ	ⅷ ғ β ȝ ᴺ
---- χ	ⅷ ı ғ ή ᴺ Ꮁ ı ₡ ı ғ ή ᴺ Ψ ק

Note:

BR:	Company Code
TIP147T:	Product Type.
****:	Lot No. Code, code change with Lot No.